

GTR Module

Silicon N Channel IGBT

High Power Switching Applications

Motor Control Applications

Features

- High input impedance
- High speed:


$t_f = 1.0\mu s$ (Max.)
 $t_{rr} = 0.5\mu s$ (Max.)
- Low saturation:

$V_{CE(sat)} = 2.7V$ (Max.)
- Enhancement mode
- The electrodes are isolated from case
- Includes a complete half bridge card in one package


Maximum Ratings (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V _{CES}	1200	V
Gate-Emitter Voltage		V _{GES}	± 20	V
Collector Current	DC	I _C	100	A
	1ms	I _{CP}	200	
Forward Current	DC	I _F	100	A
	1ms	I _{FM}	200	
Collector Power Dissipation (Tc = 25°C)		P _C	800	W
Junction Temperature		T _J	150	°C
Storage Temperature Range		T _{stg}	-40 ~ 125	°C
Isolation Voltage		V _{Isol}	2500 (AC 1 min.)	V
Screw Torque (Terminal/Mounting)		—	3/3	N ¥ m

Equivalent Circuit

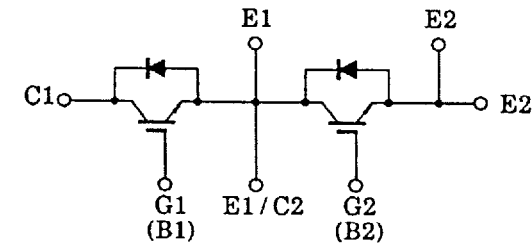








Unit in mm






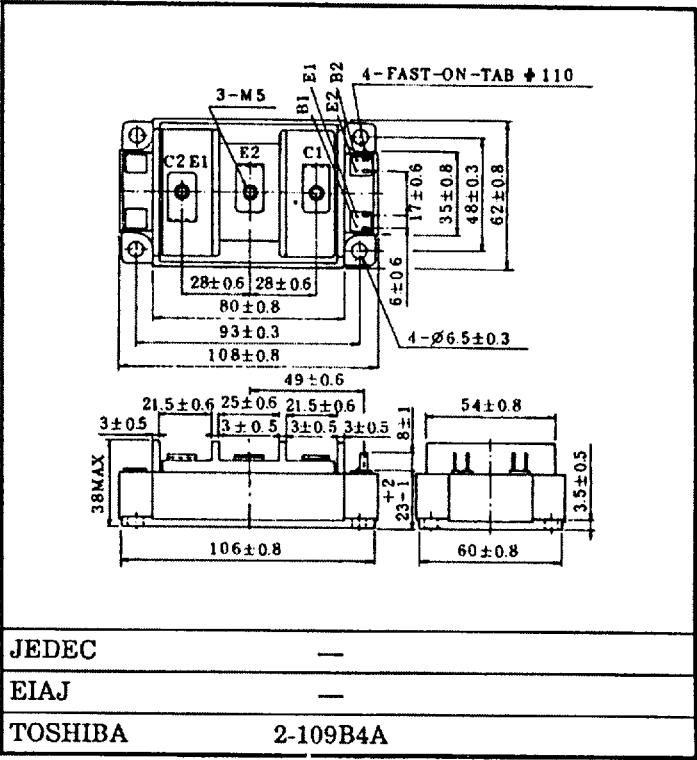


Weight : 445g


Electrical Characteristics (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	$V_{GE} = \pm 20V, V_{CE} = 0$	—	—	± 500	nA
Collector Cut-off Current		I_{CES}	$V_{CE} = 1200V, V_{GE} = 0$	—	—	2.0	mA
Gate-Emitter Cut-off Voltage		$V_{GE(OFF)}$	$I_C = 100mA, V_{CE} = 5V$	3.0	—	6.0	V
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = 100A, V_{GE} = 15V$	—	2.2	2.7	V
Input Capacitance		C_{ies}	$V_{CE} = 10V, V_{GE} = 0, f = 1MHz$	—	15600	—	pF
Switching Time	Rise Time	t_r		—	0.3	0.6	μs
	Turn-on Time	t_{on}		—	0.4	0.8	
	Fall Time	t_f		—	0.6	1.0	
	Turn-off Time	t_{off}		—	1.2	1.8	
Forward Voltage		V_F	$I_F = 100A, V_{GE} = 0$	—	2.2	3.0	V
Reverse Recovery Time		t_{rr}	$I_F = 100A, V_{GE} = -10V$ $di/dt = 200A/\mu s$	—	0.25	0.5	μs
Thermal Resistance		$R_{th(j-c)}$	Transistor	—	—	0.156	°C/W
			Diode	—	—	0.5	

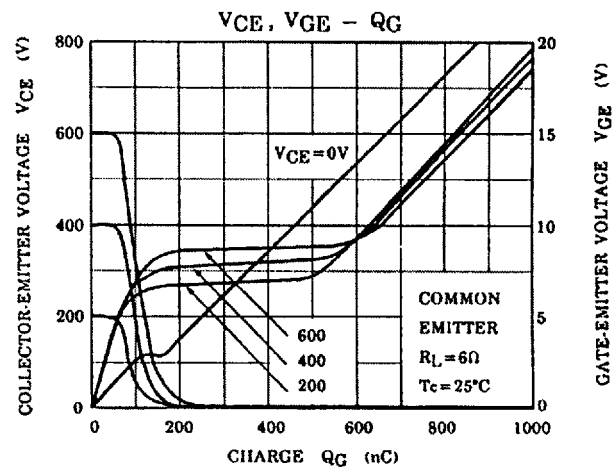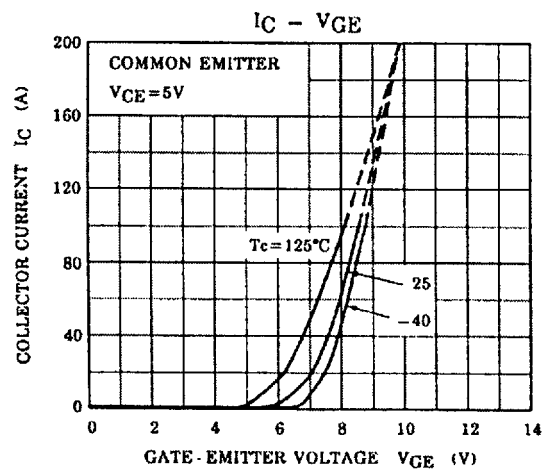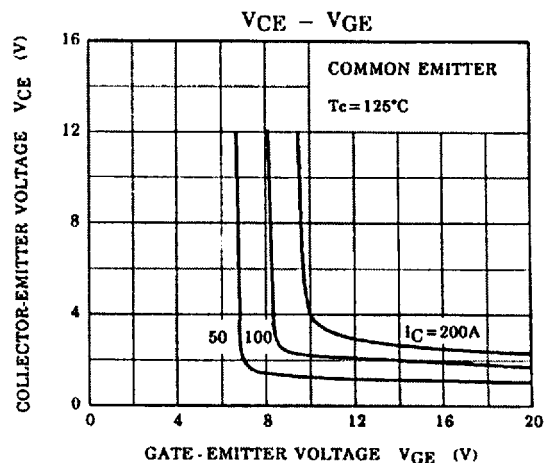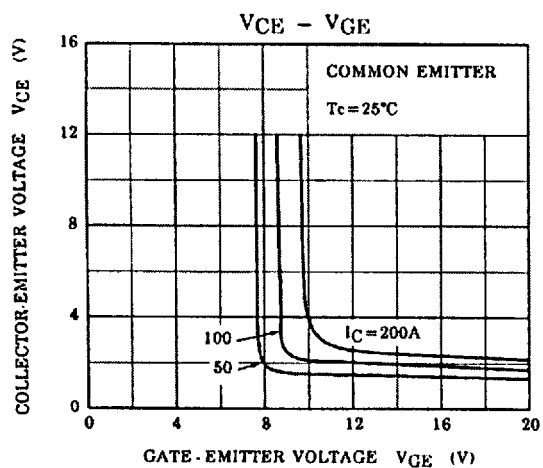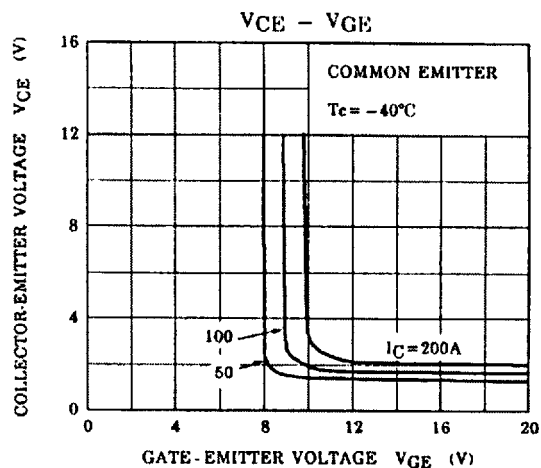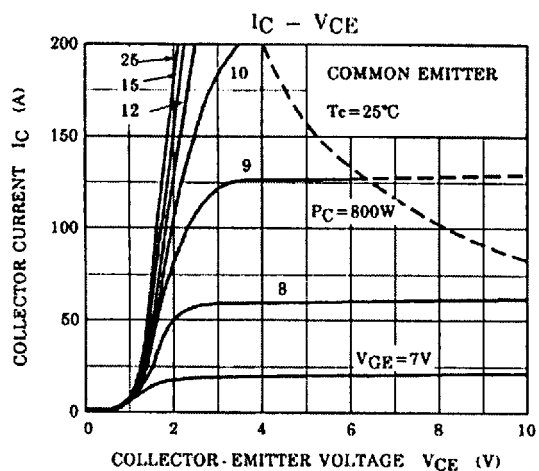

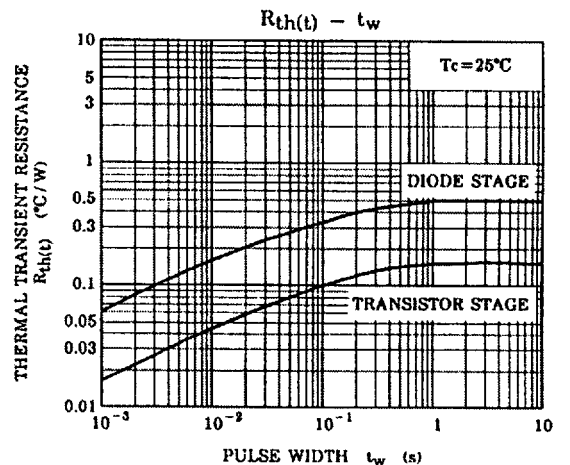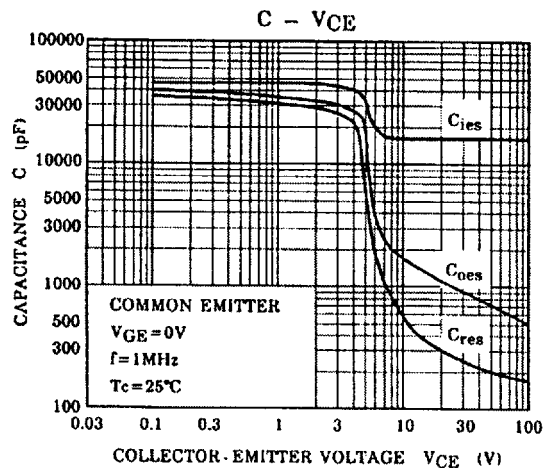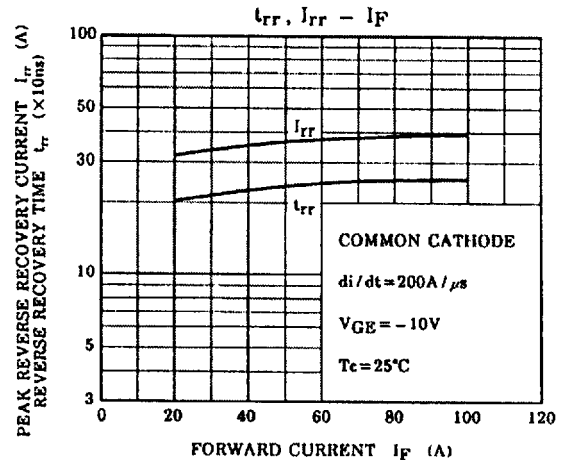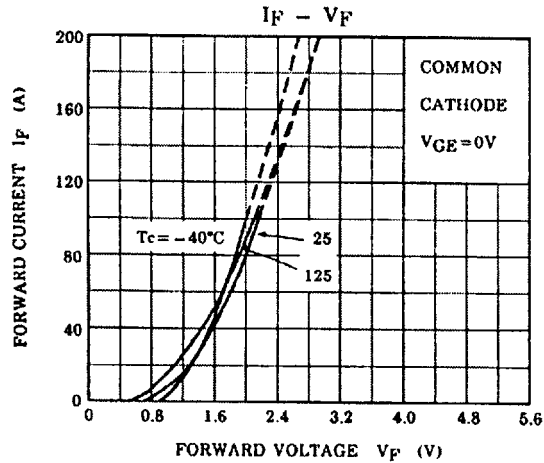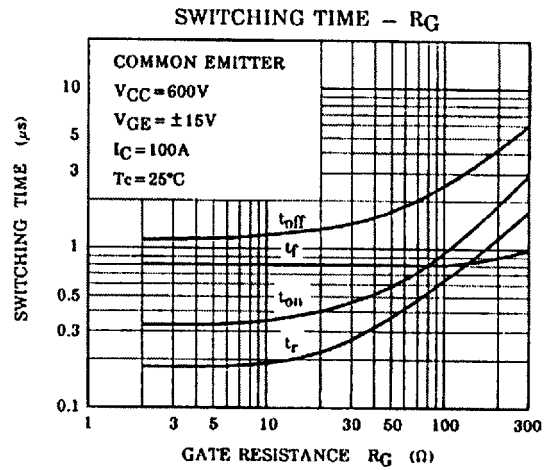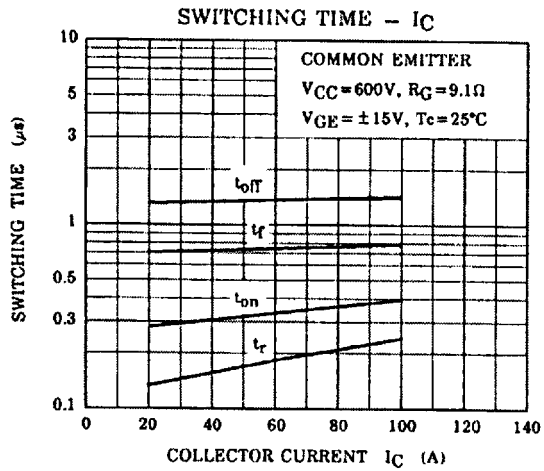

SAFE OPERATING AREA

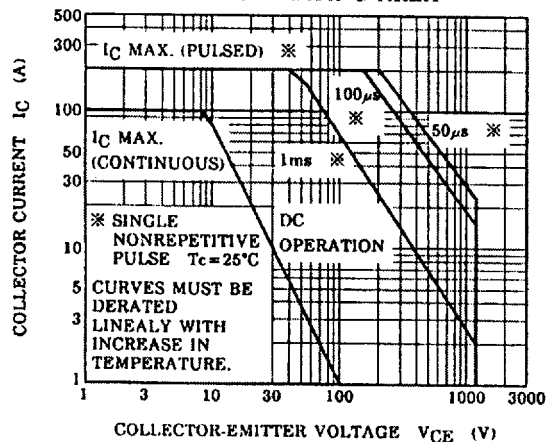

REVERSE BIAS SOA

