

IGBT MODULE (L series)

■ Features

- High Speed Switching
- Low Saturation Voltage
- Voltage Drive

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply
- Industrial Machines, such as Welding Machines

■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Items		Symbols	Ratings	Units
Collector-Emitter Voltage		V_{CES}	1200	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	Continuous	I_C	200	A
	1ms	I_C pulse	400	
	Continuous	$-I_C$	200	
	1ms	$-I_C$ pulse	400	
Max. Power Dissipation		P_C	1600	W
Operating Temperature		T_j	+150	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-40 to +125	$^{\circ}\text{C}$
Isolation Voltage	AC. 1min.	V_{is}	2500	V
Screw Torque		Mounting *1	3.5	N•m
		Terminals *2	4.5	
		Terminals *3	1.7	


● Electrical Characteristics (T_c=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =1200V T _c =25°C			4.0	mA
		V _{GE} =0V V _{CE} =1200V T _c =125°C			–	mA
Gate-Emitter Leackage Current	I _{GES}	V _{CE} =0V V _{GE} =±20V			400	nA
Gate-Emitter Threshold Voltage	V _{GE (th)}	V _{CE} =20V I _C =200mA	3.0		6.0	V
Collector-Emitter Saturation Voltage	V _{CE (sat)}	V _{GE} =15V I _C =200A		2.7	3.5	V
Input Capacitance	C _{ies}	V _{GE} =0V		36000		pF
Output Capacitance	C _{oes}	V _{CE} =10V		–		
Reverse Transfer Capacitance	C _{res}	f=1MHz		–		
Turn-on Time	t _{on}	V _{CC} =600V		0.6	0.8	μs
	t _r	I _C =200A		0.4	0.6	
Turn-off Time	t _{off}	V _{GE} =±15V		0.8	1.5	
	t _f	R _G =4.7Ω		0.3	0.5	
Diode Forward On-Voltage	V _F	I _F =200A V _{GE} =0V			2.5	V
Reverse Recovery Time	t _{rr}	I _F =200A –di/dt=600A/μs V _{GE} =–10V		200	350	ns


● Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			0.078	°C/W
	R _{th(j-c)}	Diode			0.15	
	R _{th(c-f)}	With Thermal compound		0.0125		

■ Outline Drawings

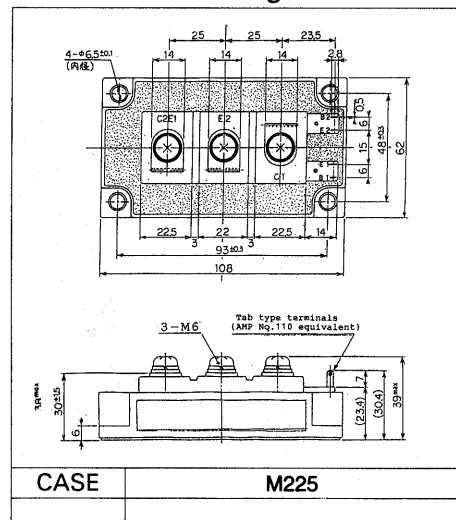


■ Equilavelent Circuit Schematic

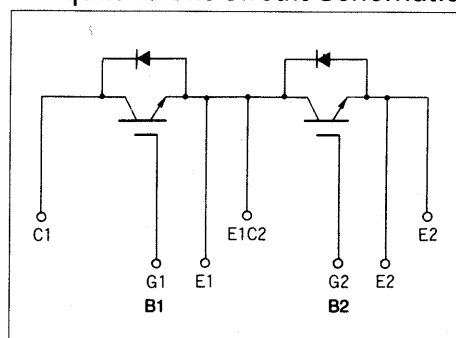


*1 Recommendable Value 2.5 ~ 3.5 N•m (M5) or (M6)

*2 Recommendable Value 3.5 ~ 4.5 N·m (M6)


*3 Recommendable Value 1.3 ~ 1.7 N•m (M4)

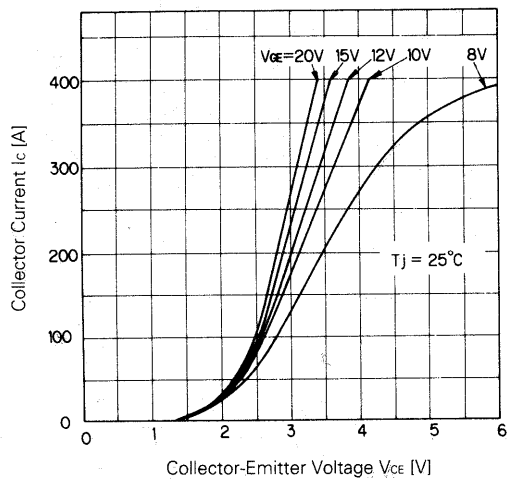


Collector Current vs. Collector-Emitter Voltage

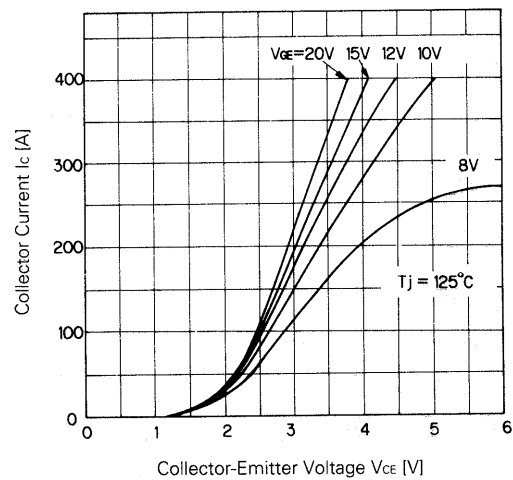


Collector Current vs. Collector-Emitter Voltage

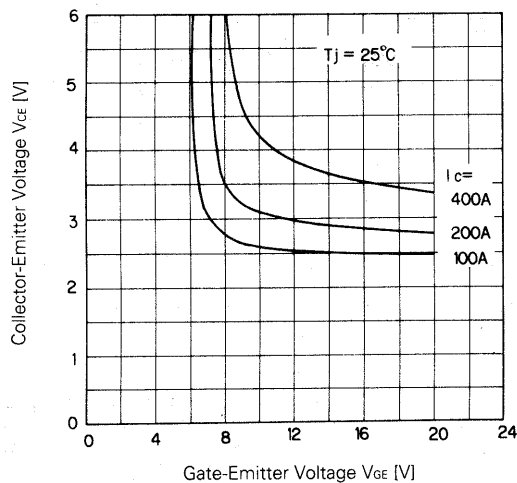


Collector-Emitter Voltage vs. Gate-Emitter Voltage

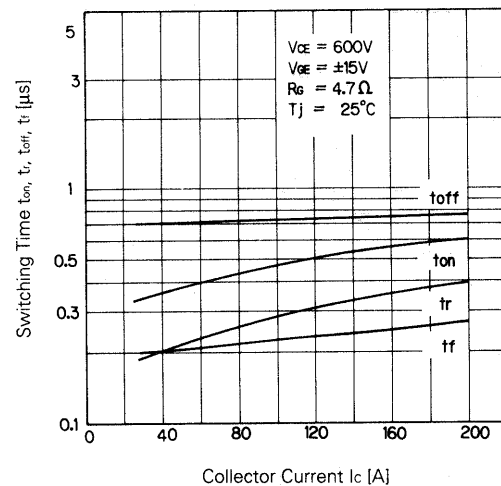


Switching Time

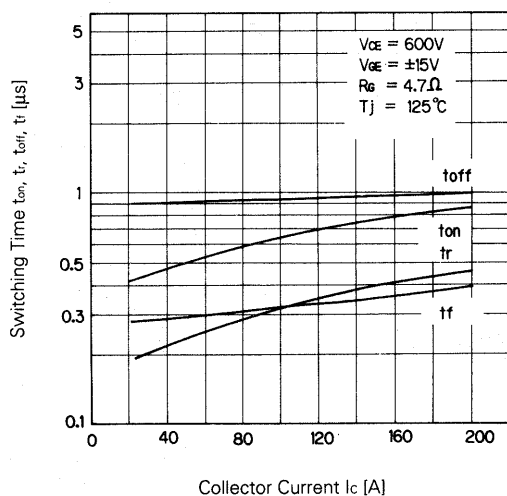


Switching Time

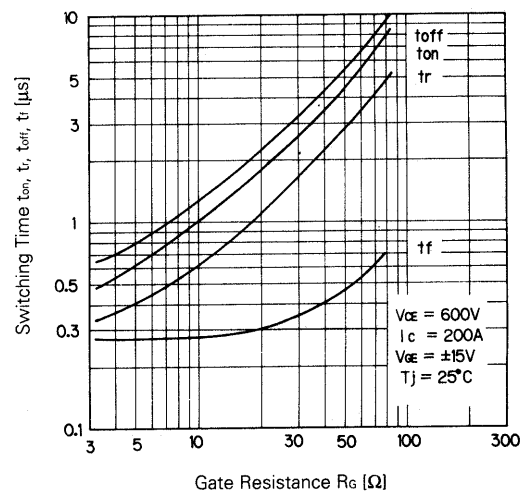


Switching Time-Gate Resistance

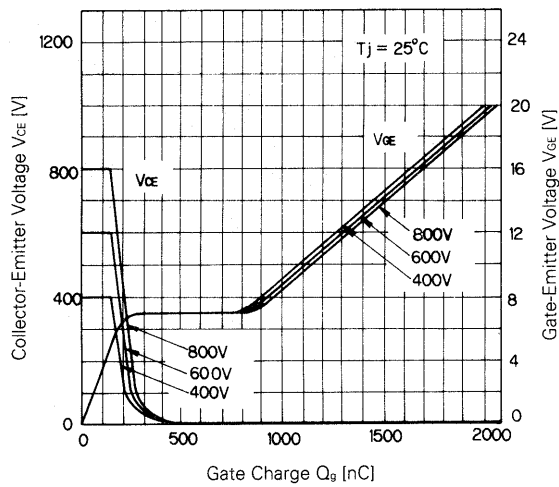


Dynamic Input Characteristic

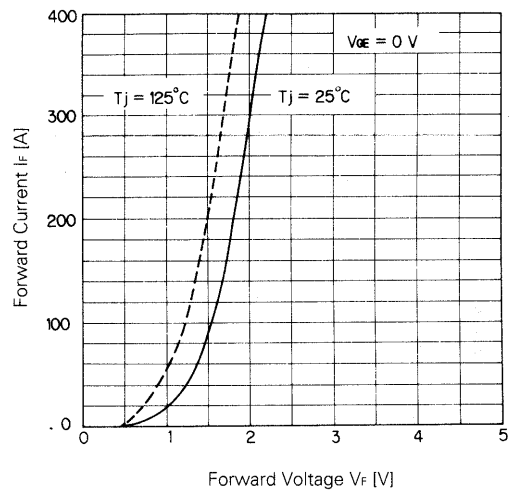


Forward Voltage of Free Wheel Diode

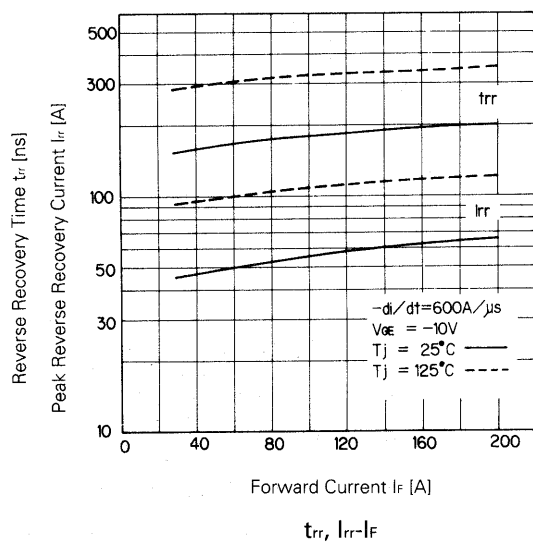


$t_{rr}, I_{rr}-I_F$

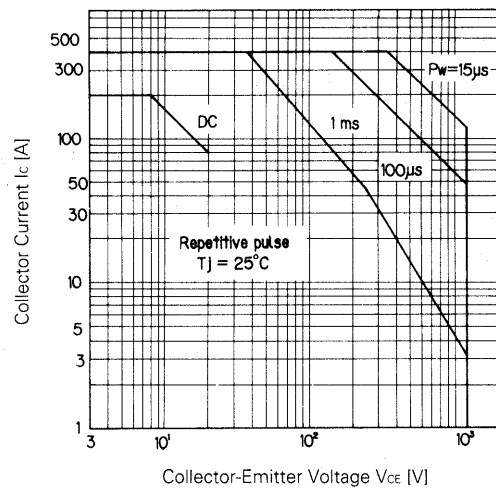

Safe Operating Area

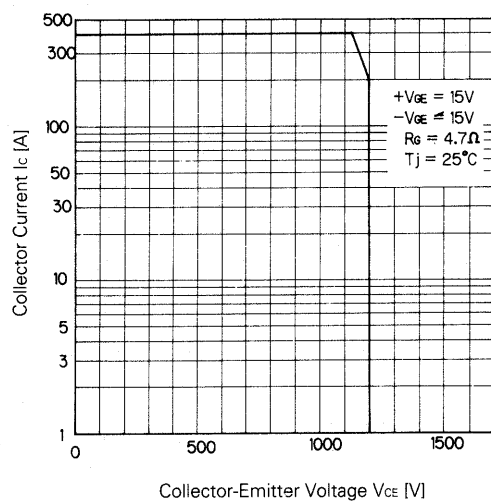

Reverse Biased Safe Operating Area

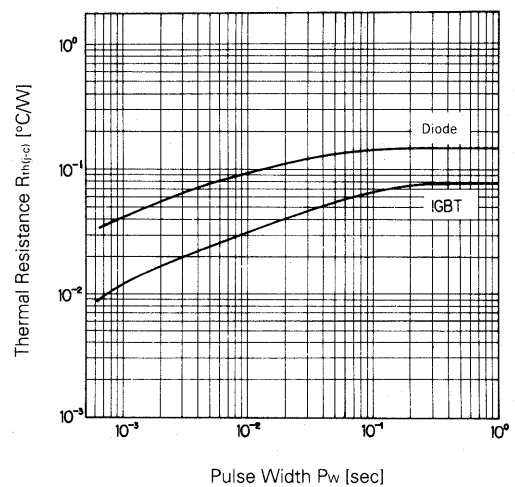

Transient Thermal Resistance

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>