

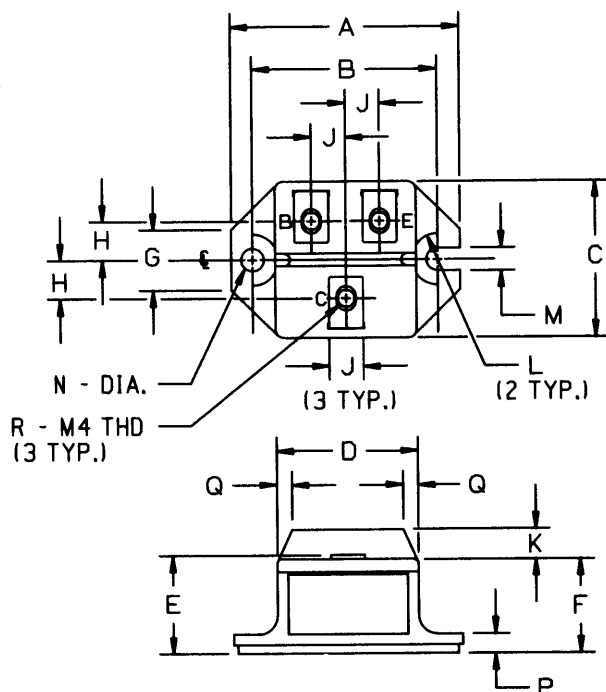


Single Darlington Transistor Module 50 Amperes/600 Volts

OUTLINE DRAWING

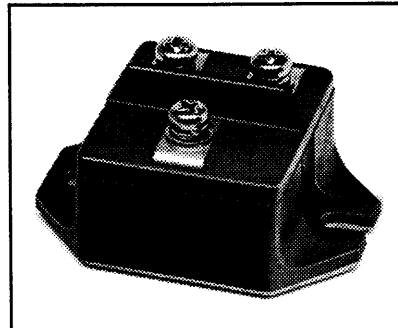

CONNECTION DIAGRAM



Description:

The Powerex Single Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and base-to-emitter speed-up diode.

Features:

- ☐ Isolated Mounting
- ☐ Planar Chips
- ☐ Discrete Fast Recovery Feedback Diode
- ☐ High Gain (h_{FE})
- ☐ Base-Emitter Speed-up Diode

Applications:

- ☐ Inverters
- ☐ DC Motor Control
- ☐ Switching Power Supplies
- ☐ AC Motor Control

Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KS524505 is a 450 $V_{CE(sus)}$ (600 V_{CEV}), 50 Ampere Single Darlington Module.

Outline Drawing

Dimensions	Inches	Millimeters
A	2.106	53.5
B	1.705 ± 0.008	43.3 ± 0.02
C	1.437	36.5
D	1.299	33
E	0.925	23.5
F	0.866	22
G	0.551	14
H	0.354	9

Dimensions	Inches	Millimeters
J	0.315	8
K	0.276	7
L	0.236 Rad.	6 Rad.
M	0.209	5.3
N	0.209 Dia.	5.3 Dia.
P	0.177	4.5
Q	0.138	3.5
R	M4 Metric	M4

Type	$V_{CE(sus)}$ Volts (X 10)	Current Rating Amperes (x 10)
KS52	45	05



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KS524505

Single Darlington Transistor Module

50 Amperes/600 Volts

Absolute Maximum Ratings, $T_J = 25^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	KS524505	Units
Junction Temperature	T_J	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	450	Volts
Collector-Emitter Sustaining Voltage, $V_{BE} = -2\text{V}$	$V_{CEV(sus)}$	600	Volts
Collector-Base Voltage	V_{CBO}	600	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage	V_{CEV}	600	Volts
Continuous Collector Current	I_C	50	Amperes
Diode Forward Current	I_{FM}	50	Amperes
Continuous Base Current	I_B	3	Amperes
Diode Surge Current	I_{FSM}	500	Amperes
Power Dissipation	P_T	310	Watts
Max. Mounting Torque M5 Terminal Screws	—	17	in.-lb.
Max. Mounting Torque M6 Mounting Screws	—	26	in.-lb.
Module Weight (Typical)	—	90	Grams
V Isolation	V_{RMS}	2000	Volts










Electrical Characteristics, $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector Cutoff Current	I_{CEV}	$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}$	—	—	1	mA
		$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}, T_C = 125^\circ\text{C}$	—	—	5	mA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 7\text{V}$	—	—	200	mA
DC Current Gain	h_{FE}	$I_C = 50\text{A}, V_{CE} = 2\text{V}$	75	—	—	—
		$I_C = 50\text{A}, V_{CE} = 5\text{V}$	100	—	—	—
Diode Forward Voltage	V_{FM}	$I_{FM} = 50\text{A}$	—	—	1.75	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 50\text{A}, I_B = 0.65\text{A}$	—	—	2.0	Volts
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 50\text{A}, I_B = 0.65\text{A}$	—	—	2.5	Volts
Resistive	Turn-on	t_{on}	$V_{CC} = 300\text{V}$	—	—	1.5 μs
Load	Storage Time	t_s	$I_C = 50\text{A}$	—	—	12 μs
Switch Times	Fall Time	t_f	$I_{B1} = I_{B2} = -1\text{A}$	—	—	3.0 μs

Thermal and Mechanical Characteristics, $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case-to-Sink	$R_{\theta(c-s)}$	—	—	—	0.15	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Transistor Part	—	—	0.4	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Diode Part	—	—	1.3	$^\circ\text{C/W}$

KS524505
Single Darlington Transistor Module
50 Amperes/600 Volts

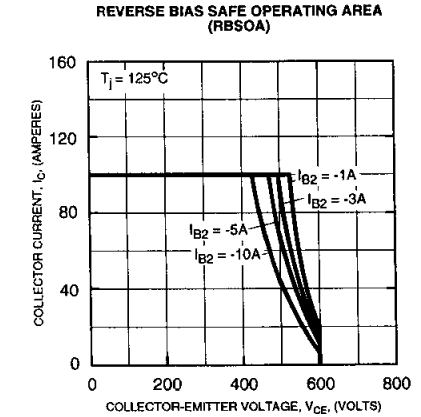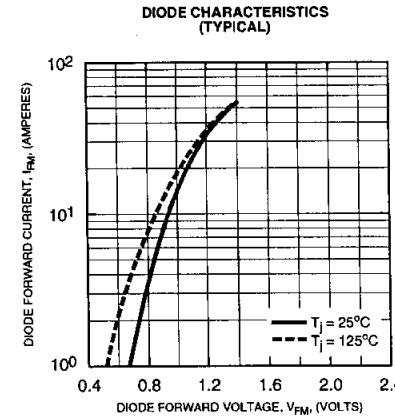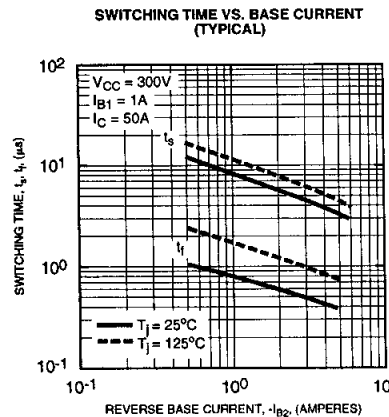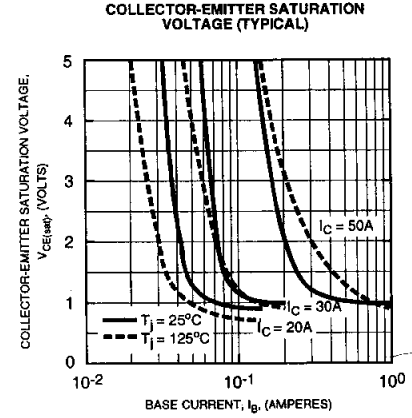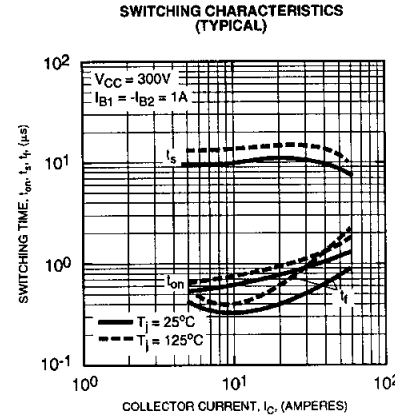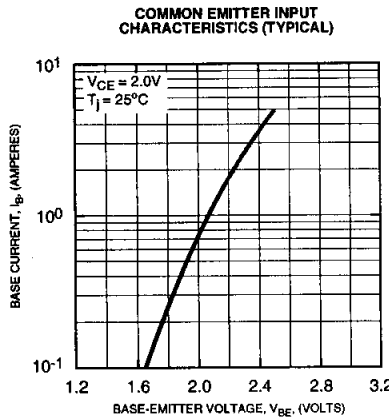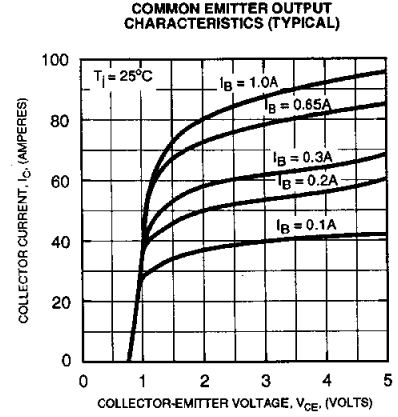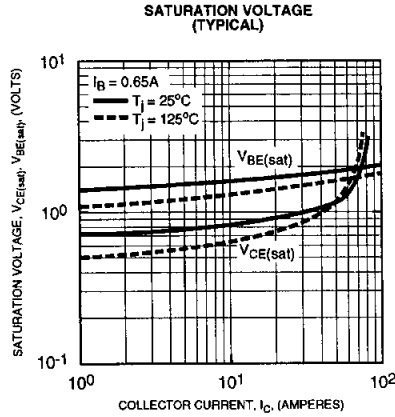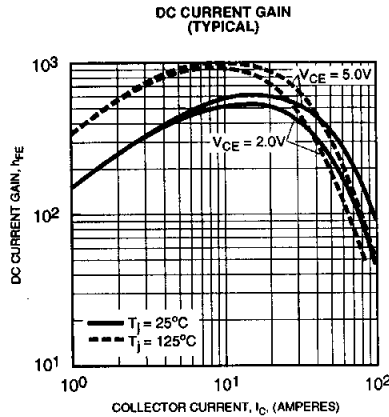

KS524505

Single Darlington Transistor Module

50 Amperes/600 Volts

