


[Features]

- Ultra-wide viewing angle UA-SFT
- High contrast
- LVDS interface
- Selectable LVDS data input map
- LED backlight*1
- Replaceable backlight lamp

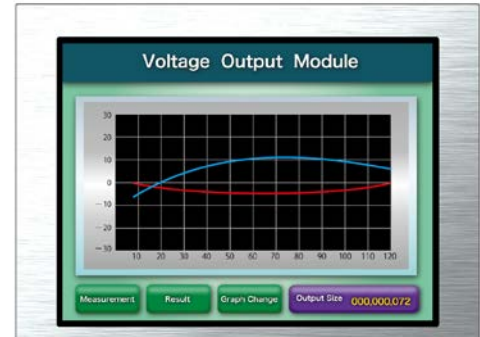

Pixel	1024(H) x 600(V)
Display area	195.072(H) x 113.4(V)mm (8.9 inches (23cm) diagonal)
Display color	16,777,216 colors (8-bit) or 262,144 colors (6-bit)
Pixel pitch	0.1905 (H) x 0.189 (V)mm
Luminance	300cd/m ² (typ.)
Contrast ratio	700:1 (typ.)
Viewing angle*2	Up: 88° (typ.), Down: 88° (typ.), Left: 88° (typ.), Right: 88° (typ.)
Response time*3	25ms (typ.)
Interface	1 x LVDS 6/8-bit
Power supply voltage	LCD panel signal processing board: 3.3V
Power consumption	2.6W (typ.)
Operating temperature	-20°C to +70°C
Storage temperature	-30°C to +80°C
Polarizer surface	Antiglare
Module size	214.0 (typ.) x 129.0 (typ.) x 5.7 (max.) mm
Weight	170g (typ.)
Backlight	LED backlight
LED driver	N/A

*1: 70k hours long life LED

*2: Contrast ratio ≥ 10:1

*3: Ton+Toff (10%←→90%)

*All information is subject to change without notice.

*Screen image is simulated.

<Tianma Japan web site>

Japanese <https://www.tianma.co.jp/jp>

English <https://www.tianma.co.jp/en>