

NEC

TFT COLOR LCD MODULE

NL8060BC31-20

30.8cm (12.1 Type)

SVGA

DATA SHEET

(2nd edition)

PRELIMINARY

All information is subject to change without notice.

Published by

1st Engineering Department
Color LCD Division
Display Device Operations Unit
NEC Electron Devices

2001 All rights reserved.

INTRODUCTION

No part of this document shall be copied in any form or by any means without the prior written consent of NEC Corporation.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a product described herein or any other liability arising from use of such application. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or of others.

While NEC Corporation has been making continuous effort to enhance the reliability of its products, the possibility of failures cannot be eliminated entirely. To minimize risks of damage to property or injury to person arising from a failure in an NEC product, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.

NEC products are classified into the following three quality grades:

"Standard", "Special", "Specific"

The *"Specific"* quality grade applies only to applications developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a product depend on its quality grade, as indicated below. Customers must check the quality grade of each application before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Military systems, aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems (medical equipment, etc.) and any other equipment

The quality grade of this product is *"Standard"* unless otherwise specified in this document. If customers intend to use this product for applications other than those specified for *"Standard"* quality grade, they should contact NEC Corporation sales representative in advance.

Anti-radioactive design is not implemented in this product.

CONTENTS

INTRODUCTION	2
1. OUTLINE.....	5
1.1 STRUCTURE AND PRINCIPLE	5
1.2 APPLICATIONS	5
1.3 FEATURES	5
2. GENERAL SPECIFICATIONS	6
3. BLOCK DIAGRAM.....	7
4. DETAILED SPECIFICATIONS	8
4.1 MECHANICAL SPECIFICATIONS.....	8
4.2 ABSOLUTE MAXIMUM RATINGS	8
4.3 ELECTRICAL CHARACTERISTICS.....	9
4.3.1 Driving for LCD panel signal processing board	9
4.3.2 Working for backlight lamp	9
4.3.3 Power supply voltage ripple	10
4.3.4 Fuses	10
4.4 POWER SUPPLY VOLTAGE SEQUENCE	11
4.4.1 Sequence for LCD panel signal processing board	11
4.4.2 Sequence for backlight inverter (Option)	11
4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS	12
4.5.1 LCD panel signal processing board	12
4.5.2 Backlight lamp.....	13
4.5.3 Positions of sockets	13
4.6 DISPLAY COLORS AND INPUT DATA SIGNALS	14
4.7 DISPLAY POSITIONS	15
4.8 SCANNING DIRECTIONS	15
4.9 INPUT SIGNAL TIMINGS FOR LCD PANEL SIGNAL PROCESSING BOARD	16
4.9.1 Outline of input signal timings	16
4.9.2 Detailed input signal timing chart for DE mode	17
4.9.3 Detailed input signal timing chart for fixed mode	18
4.9.4 Timing characteristics	19
4.10 OPTICS	20
4.10.1 Optical characteristics.....	20
4.10.2 Definition of contrast ratio.....	21
4.10.3 Definition of luminance uniformity	21
4.10.4 Definition of response times	21
4.10.5 Definition of viewing angles	21

CONTENTS

5. RELIABILITY TESTS	22
6. PRECAUTIONS	23
6.1 MEANING OF CAUTION SIGNS	23
6.2 CAUTIONS	23
6.3 ATTENTIONS	23
6.3.1 Handling of the product	23
6.3.2 Environment	23
6.3.3 Characteristics	24
6.3.4 Other	24
7. OUTLINE DRAWINGS.....	25
7.1 FRONT VIEW	25
7.2 REAR VIEW	26
REVISION HISTORY	27
1st edition	27
2nd edition	27

1. OUTLINE

1.1 STRUCTURE AND PRINCIPLE

NL8060BC31-20 module is composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight unit.

The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a color-filter glass substrate.

Color (Red, Green, Blue) data signals from a host system (e.g. PC, signal generator, etc.) are modulated into best form for active matrix system by a signal processing board, and sent to the driver LSIs which drive the individual TFT arrays.

The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array of red, green and blue dots.

1.2 APPLICATIONS

- Display terminal for control system


1.3 FEATURES

- High luminance
- Ultra wide viewing angle (Lateral electric field)
- 6-bit digital RGB signals
- Reversible-scan direction
- Edge light type
- Replaceable lamp for backlight unit (Inverter less)

2. GENERAL SPECIFICATIONS

Display area	246.0 (W) × 184.5 (H) mm (typ.)
Diagonal size of display	30.8 cm (12.1 inches)
Drive system	a-Si TFT active matrix
Display color	262,144 colors
Pixel	800 (H) × 600 (V) pixels
Pixel arrangement	RGB (Red dot, Green dot, Blue dot) vertical stripe
Dot pitch	0.1025 (W) × 0.3075 (H) mm
Pixel pitch	0.3075 (W) × 0.3075 (H) mm
Module size	280.0 (W) × 210.0 (H) × 13.0 (D) mm (typ.)
Weight	760 g (typ.)
Contrast ratio	400:1 (typ.)
Viewing angle	At the contrast ratio 10:1 • Horizontal: Left side 80° (typ.), Right side 80° (typ.) • Vertical: Up side 80° (typ.), Down side 80° (typ.)
Designed viewing direction	• Viewing angle with optimum grayscale ($\gamma=2.2$): normal axis
Polarizer surface	Non matt treatment
Polarizer pencil-hardness	3H (min.) [by JIS K5400]
Color gamut	At LCD panel center 40 % (typ.) [against NTSC color space]
Response time	80 ms (typ.) Ton + Toff
Luminance	At 5.0mAmps / lamp 250 cd/m ² (typ.)
Signal system	6-bit digital signals for data of RGB colors, Dot clock (CLK), Data enable (DE), Horizontal synchronous signal (Hsync), Vertical synchronous signal (Vsync)
Power supply voltage	LCD panel signal processing board: 3.3V or 5.0V
Backlight	Edge light type: 2 cold cathode fluorescent lamps Replaceable parts • Lamps for backlight unit: Type No. TBD Recommended inverter (Option) • Inverter: Type No. 121PW111
Power consumption	At maximum luminance and checkered flag pattern 7.0 W (typ.)

3. BLOCK DIAGRAM

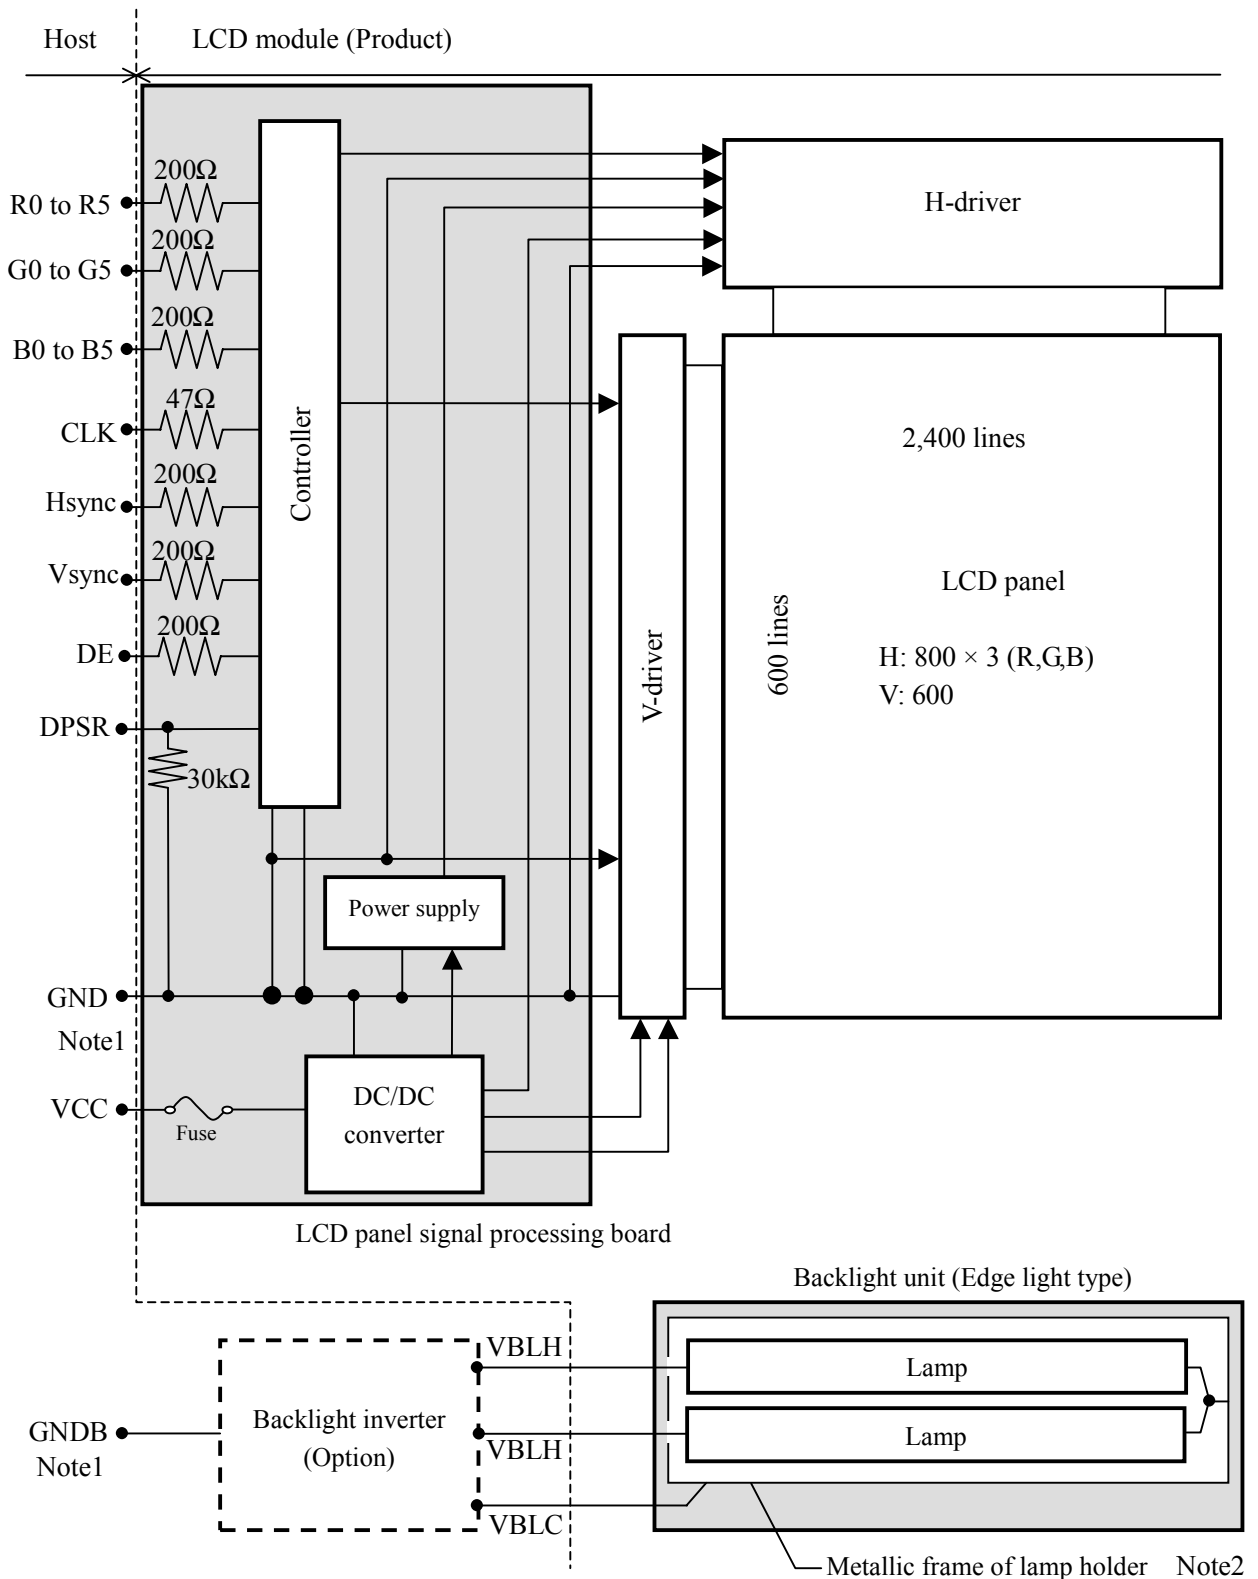

Note 1: GND and GNDB (Backlight inverter ground) should be connected together in customer equipment.

Note2: The metallic frame of lamp holder is used to a transmission line for VBLC.

4. DETAILED SPECIFICATIONS

4.1 MECHANICAL SPECIFICATIONS

Parameter	Specification	Unit
Module size	280.0 ± 0.5 (W) $\times$ 210.0 ± 0.5 (H) $\times$ 13.0 ± 0.7 (D) Note1	mm
Display area	246.0 ± 0.5 (W) $\times$ 184.5 ± 0.5 (H) Note1	mm
Weight	760 (typ.), 800 (max.)	g

Note1: See "7.OUTLINE DRAWINGS".

4.2 ABSOLUTE MAXIMUM RATINGS

Parameter			Symbol	Rating	Unit	Remarks
Power supply voltage	LCD panel signal board		VCC	-0.3 to +6.5	V	Ta = 25°C
	Lamp	High voltage side (Hot) Note1	VLH	2,000	Vrms	
		Low voltage side (Cold) Note2	VBLC	42.4	Vrms	
Input voltage for signals	Display signals Note3		VD	-0.3 to VCC+0.3	V	
	Function signals Note4		VF	-0.3 to VCC+0.3	V	
Storage temperature			Tst	-20 to +60	°C	-
Operating temperature		Front surface	TopF	0 to +55	°C	
		Rear surface	TopR	TBD	°C	
Relative humidity Note5			RH	≤ 95	%	Ta ≤ 40°C
				≤ 85	%	40 < Ta ≤ 50°C
				≤ 70	%	50 < Ta ≤ 55°C
Absolute humidity Note5			-	≤ 78 Note6	g/m³	Ta > 55°C

Note1: "VLH" is the voltage value between low voltage terminal (Cold) and high voltage terminal (Hot).

Note2: "VBLC" is the voltage value between backlight inverter ground (GNDB) and low voltage terminal (Cold).

Note3: Display signals are CLK, Hsync, Vsync, DE and DATA (R0 to R5, G0 to G5, B0 to B5).

Note4: Function signal is DPSR.

Note5: No condensation

Note6: Ta = 55°C, RH = 70%

4.3 ELECTRICAL CHARACTERISTICS

4.3.1 Driving for LCD panel signal processing board

(Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remarks
Power supply voltage	VCC	3.0	3.3	3.6	V	for 3V system
		4.7	5.0	5.3	V	for 5V system
Power supply current	ICC	-	400 Note1	600	mA	VCC = 3.3V
		-	300 Note1	500	mA	VCC = 5.0V
Logic input voltage for display signals	Low	VDLL	0	-	0.3Vcc	CMOS level
	High	VDLH	0.7Vcc	-	Vcc	
Input voltage for DPSR signal	Low	VFDL	0	-	0.3Vcc	
	High	VFDH	0.7Vcc	-	Vcc	


Note1: Checkered flag pattern [by EIAJ ED-2522]

4.3.2 Working for backlight lamp

Parameter	Symbol	Ta	Min.	Typ.	Max.	Unit	Remarks
Starting voltage	VS	0°C	1,200	-	-	Vrms	Note1
		25°C	960	-	-	Vrms	
Power supply voltage	VLH	25°C	-	600	-	Vrms	Note1, Note2
Power supply current	IBL	25°C	3.0	5.0	6.0	mArms	Note2, Note3
Oscillation frequency	FO	25°C	58	65	69	kHz	Note4

Note1: The power supply voltage cycle between lamps should be kept on a same phase. "VS" and "VLH" are the voltage value between low voltage side (Cold) and high voltage side (Hot).

Note2: The asymmetric ratio of working waveform for lamps (Power supply voltage peak ratio, power supply current peak ratio and waveform space ratio) should be less than 5 % (See the following figure.). If the waveform is asymmetric, DC (Direct current) element apply into the lamp. In this case, a lamp lifetime may be shortened, because a distribution of a lamp enclosure substance inclines toward one side between low voltage terminal (Cold terminal) and high voltage terminal (Hot terminal).

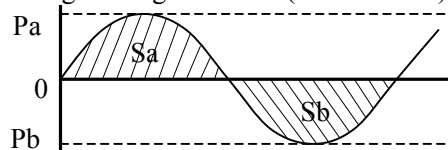

$$\frac{|Pa - Pb|}{Pb} \times 100 \leq 5\%$$

$$\frac{|Sa - Sb|}{Sb} \times 100 \leq 5\%$$

Pa: Supply voltage/current peak for positive, Pb: Supply voltage/current peak for negative

Sa: Waveform space for positive part, Sb: Waveform space for negative part

Note3: The lamp holder of this product contains two backlight lamps. The low voltage terminal of both lamps is connected to one contact point. Also above power supply current specification is one lamp duty. Therefore, this lamp holder becomes twice as many power supply current as above value on low voltage (Cold) line. The measurement for the power supply current value of one lamp should measure on high voltage (Hot) line to each lamp.

Note4: In case "FO" is not the recommended value, beat noise may display on the screen, because of interference between "FO" and "1/th". Recommended value of "FO" is as following.

$$FO = \frac{1}{4} \times \frac{1}{th} \times (2n-1)$$

th: Horizontal synchronous cycle (See "4.9.4 Timing characteristics".)

n: Natural number (1, 2, 3)

4.3.3 Power supply voltage ripple

This product works, even if the ripple voltage levels are beyond the permissible values as following the table, but there might be noise on the display image.

Parameter	Power supply voltage	Ripple voltage (Measure at input terminal of power supply)	Note1 Unit
VCC	3.3 V	≤ 100	mVp-p
	5.0 V	≤ 100	mVp-p

Note1: The permissible ripple voltage includes spike noise.

4.3.4 Fuses


Fusing line	Fuse		Rating	Unit	Remark
	Type	Supplier			
VCC	TBD	TBD	TBD	A	Note1, Note2
			TBD	V	-

Note1: This current rating is a fusing current.

Note2: The power capacity should be more than the fusing current rating. If the power capacity is less than the criteria value, the fuse may not blow, and then nasty smell, smoking and so on may occur.

4.4 POWER SUPPLY VOLTAGE SEQUENCE

4.4.1 Sequence for LCD panel signal processing board

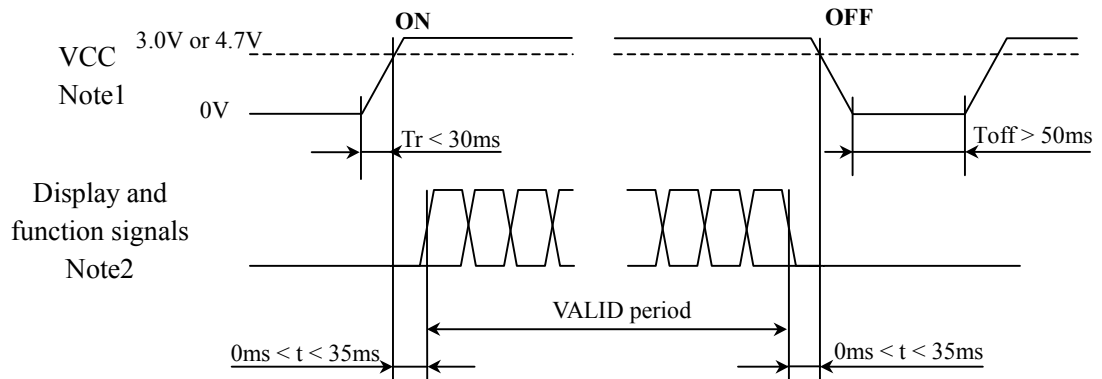


Note1: In terms of voltage variation (voltage drop) while VCC rising edge is below 3.0V in "VCC = 3.3V" or 4.7V in "VCC = 5.0V", a protection circuit may work, and then this product may not work.

Note2: Display (CLK, Hsync, Vsync, DE, R0 to R5, G0 to G5, B0 to B5) and function (DPSR) signals must be Low or High-impedance, exclude the VALID period (See above sequence diagram), in order to avoid that internal circuits is damaged.

If some of display and function signals of this product are cut while this product is working, even if the signal input to it once again, it might not work normally. If customer stops the display and function signals, they should be cut VCC.

4.4.2 Sequence for backlight inverter (Option)

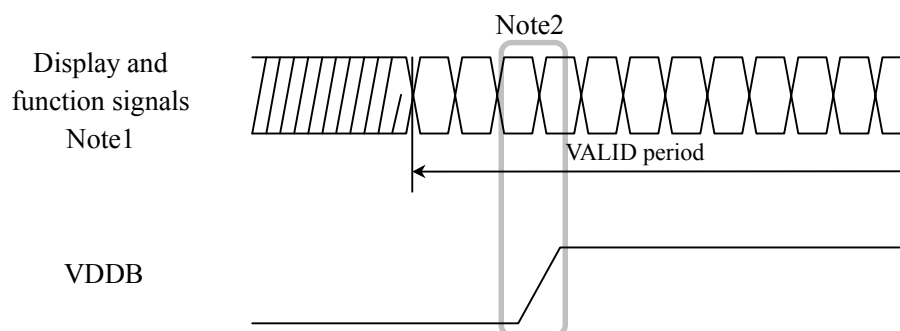

Note1: These are display and function signals for LCD panel signal processing board.

Note2: The backlight inverter voltage (VDDb) should be inputted within the valid period of display and function signals, in order to avoid unstable data display.

4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS

4.5.1 LCD panel signal processing board

CN1 socket (LCD module side): DF9-41P-1V (Hirose Electric Co., Ltd.)


Adaptable plug: DF9-41S-1V (Hirose Electric Co., Ltd.)

IL-310-T41S-VF (Japan Aviation Electronics Industry Limited)

Pin No.	Symbol	Signal	Remarks
1	GND	Ground	-
2	CLK	Dot clock	
3	GND	Ground	
4	Hsync	Horizontal synchronous	
5	Vsync	Vertical synchronous	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	R0	Red data (LSB)	Least significant bit
10	R1	Red data	-
11	R2	Red data	
12	GND	Ground	
13	R3	Red data	
14	R4	Red data	
15	R5	Red data (MSB)	Most significant bit
16	GND	Ground	-
17	GND	Ground	
18	GND	Ground	
19	G0	Green data (LSB)	Least significant bit
20	G1	Green data	-
21	G2	Green data	
22	GND	Ground	
23	G3	Green data	
24	G4	Green data	
25	G5	Green data (MSB)	Most significant bit
26	GND	Ground	-
27	GND	Ground	
28	GND	Ground	
29	B0	Blue data (LSB)	Least significant bit
30	B1	Blue data	-
31	B2	Blue data	
32	GND	Ground	
33	B3	Blue data	
34	B4	Blue data	
35	B5	Blue data (MSB)	Most significant data
36	GND	Ground	-
37	DE	Select of DE / Fixed mode	DE mode: Data enable signal, Fixed mode: Open
38	NC	Non connection	-
39	VCC	Power supply	
40	VCC	Power supply	
41	DPSR	Select of scan direction	Normal scan: Low or Open, Reverse scan: High Note1

Note1: See "4.8 SCANNING DIRECTIONS".

CN1: Figure of socket



4.5.2 Backlight lamp

CN2 socket: BHR-03VS-1 (J.S.T Mfg. Co., Ltd.)


Adaptable plug: SM03 (4.0) B-BHS-TB (J.S.T Mfg. Co., Ltd.)

Pin No.	Symbol	Signal	Remarks
1	VBLC	Low voltage (Cold)	-
2	VBLH	High voltage (Hot)	
3	VBLH	High voltage (Hot)	

CN2: Figure of socket

1	2	3
---	---	---

4.5.3 Positions of sockets

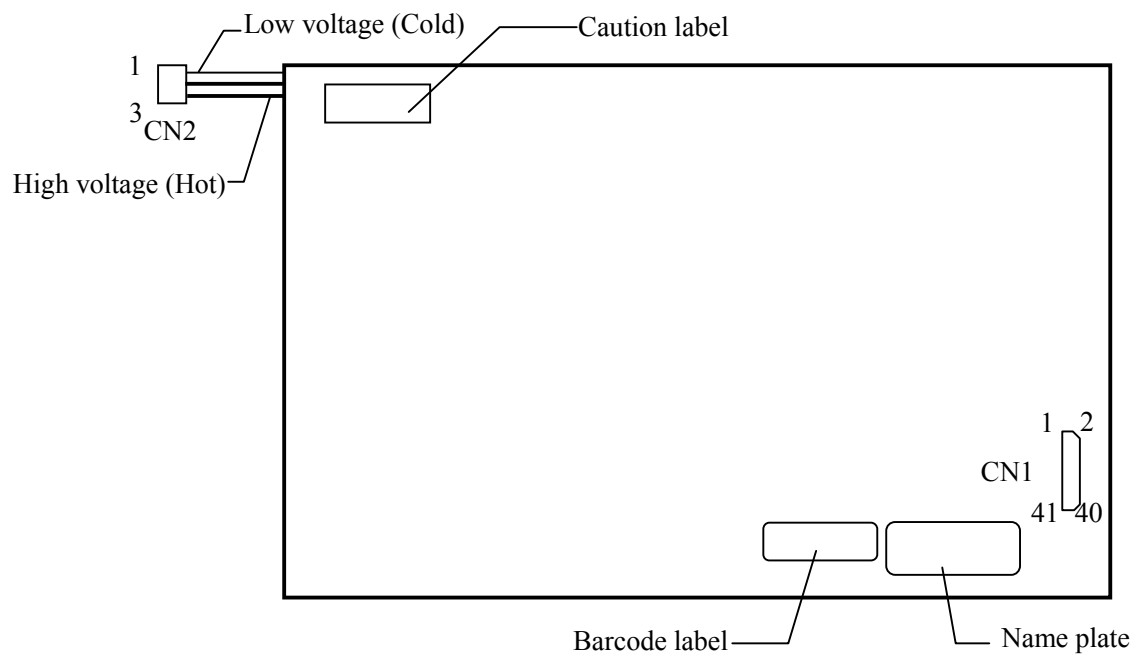

4.6 DISPLAY COLORS AND INPUT DATA SIGNALS

This product can display in equivalent to 262,144 colors in 64 scale. Also the relation between display colors and input data signals is as the following table.

Display colors		Data signal (0: Low level, 1: High level)																	
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑				:					:						:			
	↓				:					:						:			
	bright	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
Green scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	↑				:					:						:			
	↓				:					:						:			
	bright	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
Blue scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
	↑				:					:						:			
	↓				:					:						:			
	bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
		0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
		0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

4.7 DISPLAY POSITIONS

The following table is the coordinates per pixel (See figure of "4.8 SCANNING DIRECTIONS").

C(0, 0)	C(1, 0)	...	C(X, 0)	...	C(798, 0)	C(799, 0)
C(0, 1)	C(1, 1)	...	C(X, 1)	...	C(798, 1)	C(799, 1)
⋮	⋮	⋮	⋮	⋮	⋮	⋮
C(0, Y)	C(1, Y)	...	C(X, Y)	...	C(798, Y)	C(799, Y)
⋮	⋮	⋮	⋮	⋮	⋮	⋮
C(0,598)	C(1,598)	...	C(X,598)	...	C(798,598)	C(799,598)
C(0,599)	C(1,599)	...	C(X,599)	...	C(798,599)	C(799,599)

4.8 SCANNING DIRECTIONS

The following figures are seen from a front view. Also the arrow shows the direction of scan.

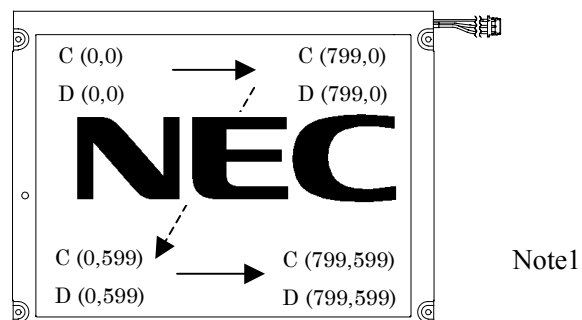


Figure 1. Normal scan (DPSR: Low or Open)

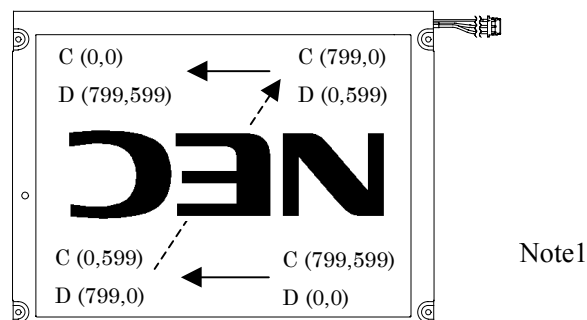


Figure 2. Reverse scan (DPSR: High)

Note1: Meaning of C (X, Y) and D (X, Y)


C (X, Y): The coordinates of the display position (See "4.7 DISPLAY POSITIONS".)

D (X, Y): The data number of input signal for LCD panel signal processing board

4.9 INPUT SIGNAL TIMINGS FOR LCD PANEL SIGNAL PROCESSING BOARD


4.9.1 Outline of input signal timings

• Horizontal signal

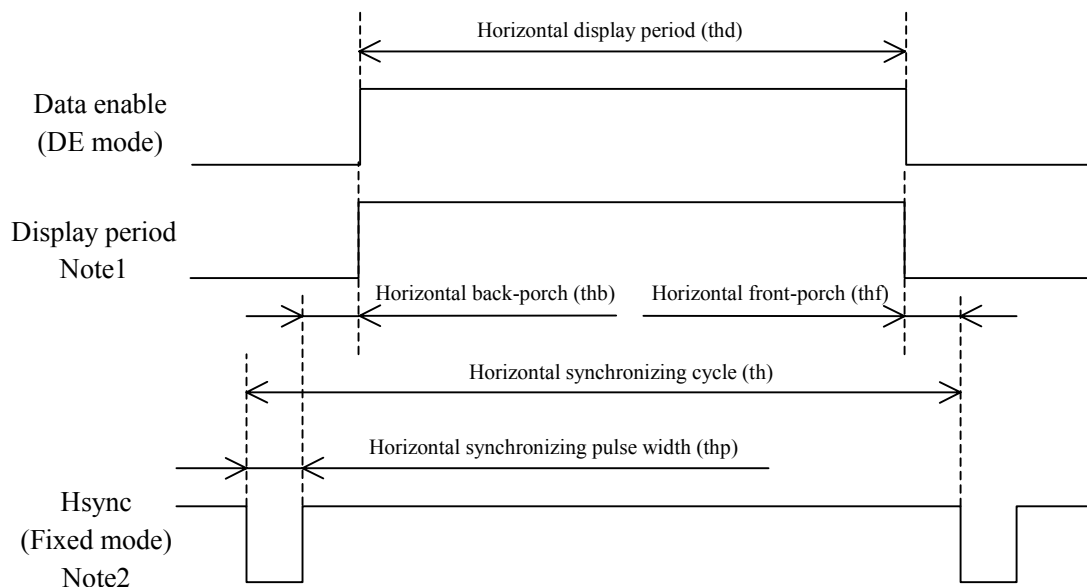

Note1: This diagram indicates virtual signal for set up to timing.

• Vertical signal

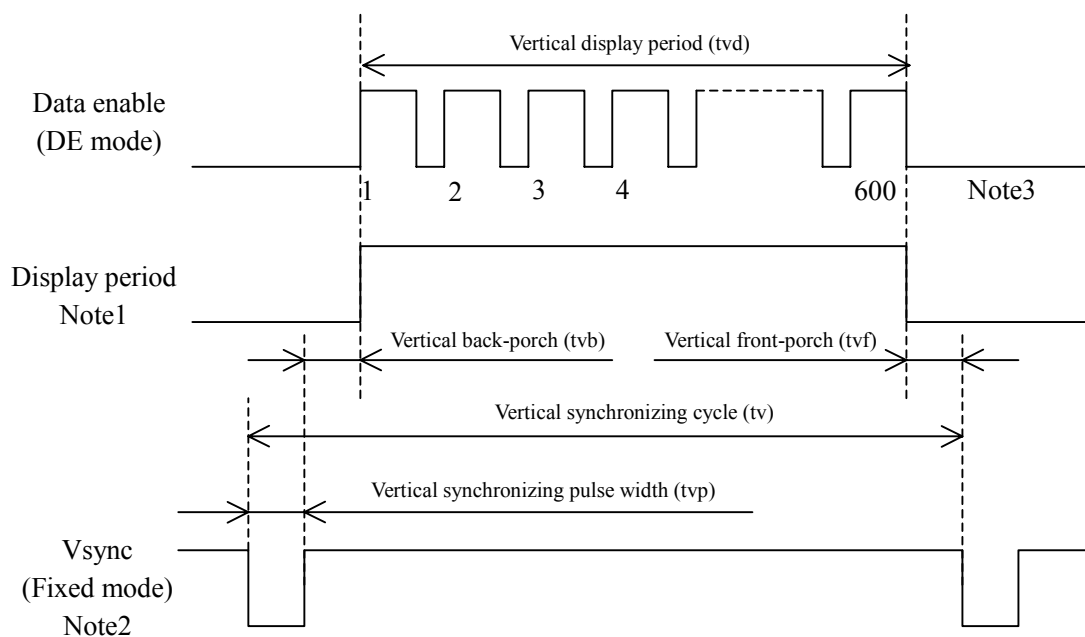


Note1: This diagram indicates virtual signal for set up to timing.

Note2: Fixed mode cannot be used while working of DE mode.

Note3: See "4.9.2 Detailed input signal timing chart for DE mode" and "4.9.3 Detailed input signal timing chart for fixed mode" for numeration of pulse.


4.9.2 Detailed input signal timing chart for DE mode

- Outline chart

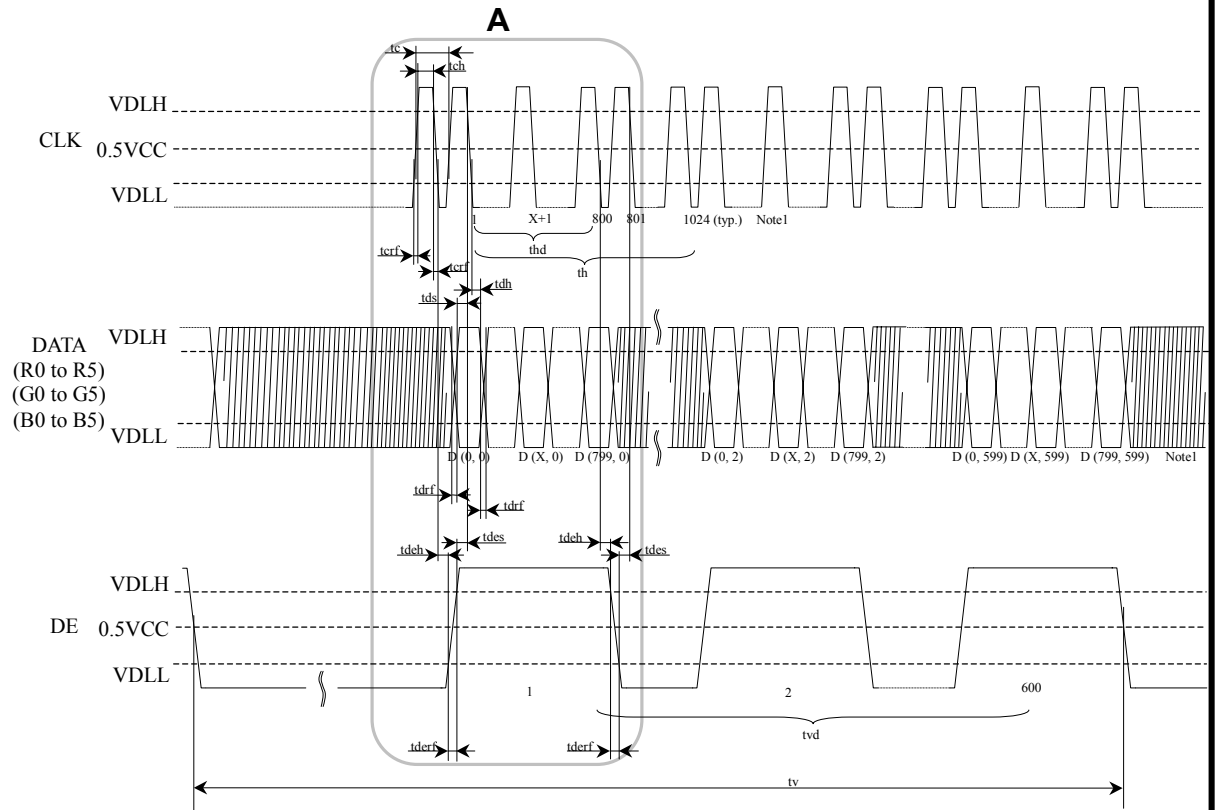

Note1: X is data number from 1 to 798. See "4.8 SCANNING DIRECTIONS".


- Detail of **A** part

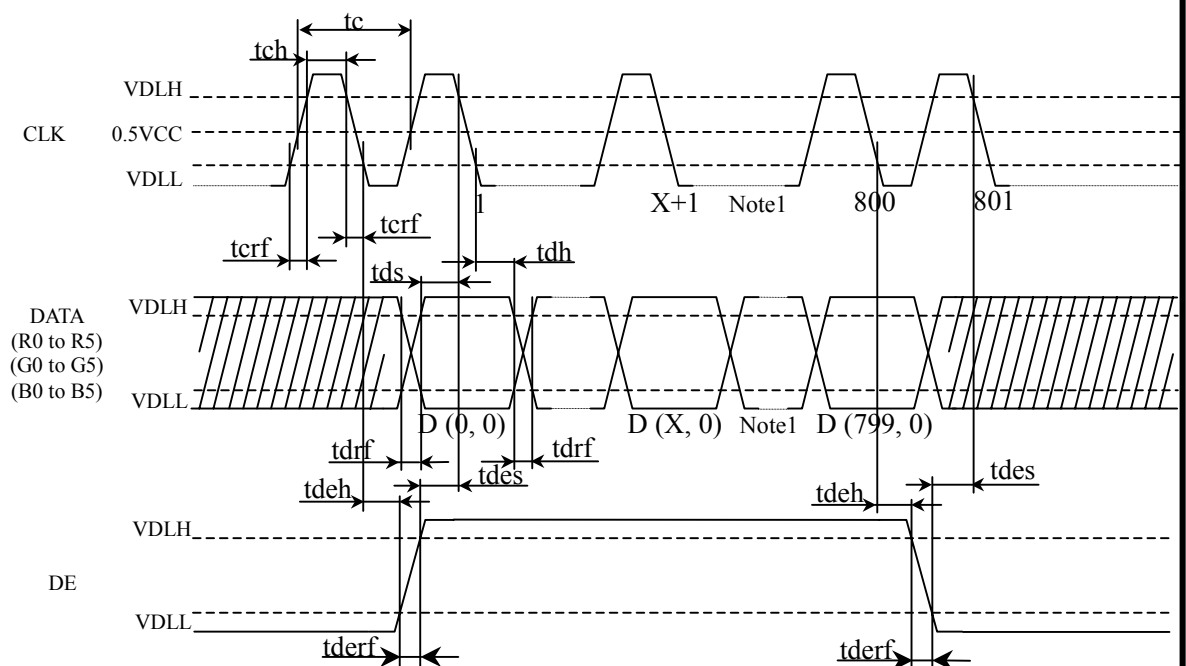

Note1: X is data number from 1 to 798. See "4.8 SCANNING DIRECTIONS".


4.9.3 Detailed input signal timing chart for fixed mode

- Outline chart

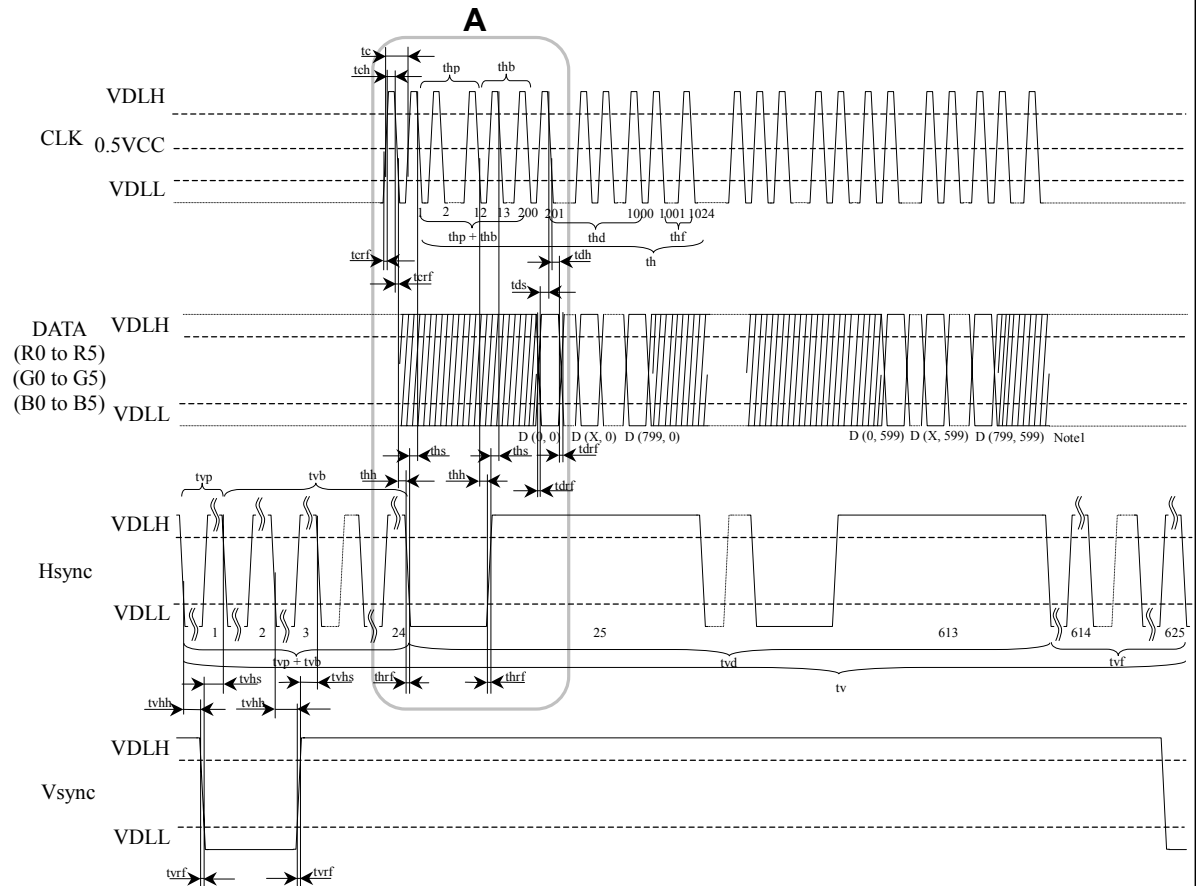

Note1: X is data number from 1 to 798. See "4.8 SCANNING DIRECTIONS".

- Detail of **A** part

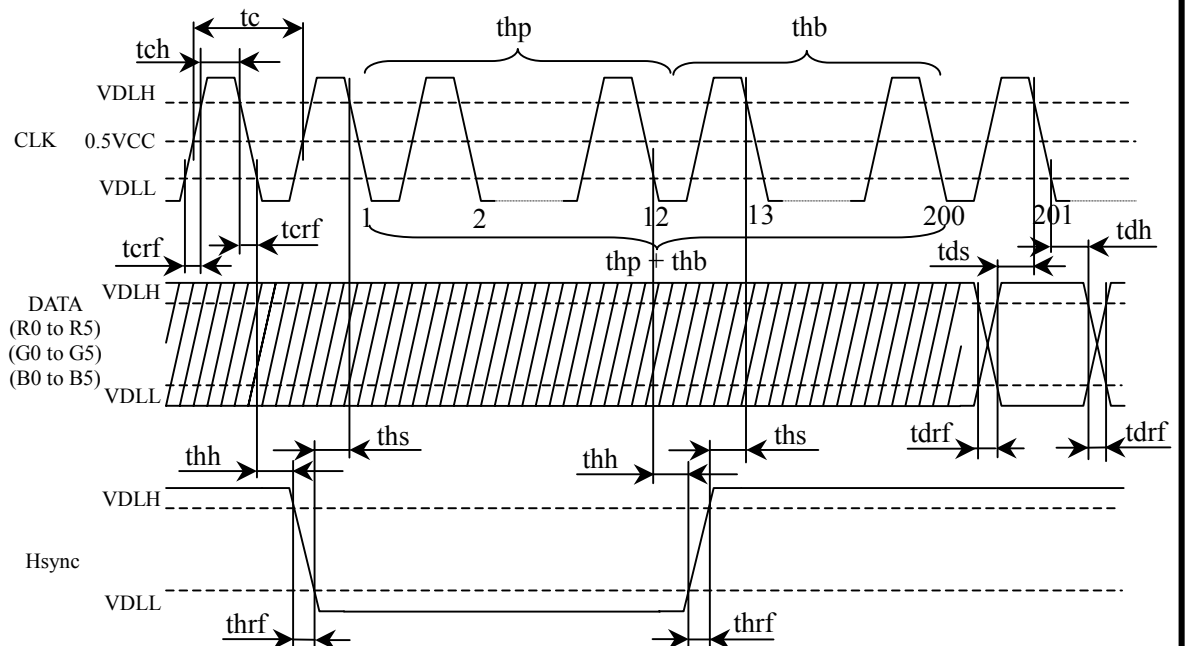

4.9.4 Timing characteristics

- Common to DE mode and fixed mode

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remarks
CLK	Frequency	tcf	34.0	38.4	40.0	MHz	39.7 ns (typ.) Note1
	Duty	tcd	0.4	-	0.6	-	Note1
	Rise time, Fall time	trcf	-	-	10	ns	-
DATA	CLK-DATA	Setup time	8	-	-	ns	
		Hold time	10	-	-	ns	
	Rise time, Fall time	tdrf	-	-	10	ns	

Note1: Definition of units is as follows.

$$tcf = 1/tc, tcd = tch/tc = tch \times tcd$$

- DE mode

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remarks
DE	Horizontal	Cycle	th	TBD	1024	-	Note1
		Display period	thd	800		CLK	
	Vertical (One frame)	Cycle	tv	TBD	625	-	
		Display period	tvd	600		H	
	CLK-DE	Setup time	tdes	8	-	-	-
		Hold time	tdeh	10	-	-	
	Rise time, Fall time		tderf	-	-	10	

Note1: Definition of units is as follows.

$$tc = 1CLK, th = 1H$$

- Fixed mode

Parameter			Symbol	Min.	Typ.	Max.	Unit	Remarks
Hsync	Cycle		th	25.6	26.7	30.1	μ s	37.5 kHz (typ.)
				1024			CLK	Note1
	Display period		thd	800		CLK		
	Front-porch		thf	24		CLK		
	Pulse width		thp	12	72	-	CLK	
	Back-porch		thb	-	128	198	CLK	
	Total of pulse width and back-porch		thp + thb	200			CLK	Note1, Note2
	CLK- Hsync	Setup time	ths	8	-	-	ns	-
		Hold time	thh	10	-	-	ns	
Rise time, Fall time		thrf	-	-	10	ns		
Vsync	Cycle		tv	16.0	16.7	18.8	ms	59.9 Hz (typ.)
				625			H	Note1
	Display period		tvd	600		H		
	Front-porch		tvf	1		H		
	Pulse width		tvp	1	-	2	H	
	Back-porch		tvb	22	-	23	H	
	Total of pulse width and back-porch		tvp + tvb	24			H	Note1, Note2
	Vsync-Hsync	Setup time	tvhs	15	-	-	ns	Note1
		Hold time	tvhh	1	-	-	CLK	
Rise time, Fall time		tvrf	-	-	10	ns	-	

Note1: Definition of units is as follows.

$$tc = 1CLK, th = 1H$$

Note2: Keep $tvp + tvb$ and $thp + thb$ within the table. If it is out of specification, display position will be shifted to right/left side or up/down.

4.10 OPTICS

4.10.1 Optical characteristics


2

Parameter Note1			Condition	Symbol	Min.	Typ.	Max.	Unit	Remarks
Contrast ratio			White/Black at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$	CR	200	400	-	-	Note2
Luminance			White at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$	L	200	250	-	cd/m ²	-
Luminance uniformity			-	LU	-	1.25	1.40	-	Note3
Chromaticity	White	x coordinate	Wx	-	TBD	-	-	Note4	
		y coordinate	Wy	-	TBD	-	-		
	Red	x coordinate	Rx	-	TBD	-	-		
		y coordinate	Ry	-	TBD	-	-		
	Green	x coordinate	Gx	-	TBD	-	-		
		y coordinate	Gy	-	TBD	-	-		
	Blue	x coordinate	Bx	-	TBD	-	-		
		y coordinate	By	-	TBD	-	-		
Color gamut		$\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$ at center, against NTSC color space	C	-	40	-	%		
Response time		White to Black	Ton	-	40	TBD	ms	Note5 Note6	
		Black to White	Toff	-	40	TBD	ms		
Viewing angle	CR = 10	Right	$\theta U = 0^\circ, \theta D = 0^\circ$	θR	-	80	-	°	Note7
		Left	$\theta U = 0^\circ, \theta D = 0^\circ$	θL	-	80	-	°	
		Up	$\theta R = 0^\circ, \theta L = 0^\circ$	θU	-	80	-	°	
		Down	$\theta R = 0^\circ, \theta L = 0^\circ$	θD	-	80	-	°	

Note1: Measurement conditions are as follows.

Ta = 25°C, VCC = 3.3V, IBL = 5.0mA

Optical characteristics are measured at luminance saturation after 20minutes from working the product, in the dark room. Also measurement method for luminance is as follows.

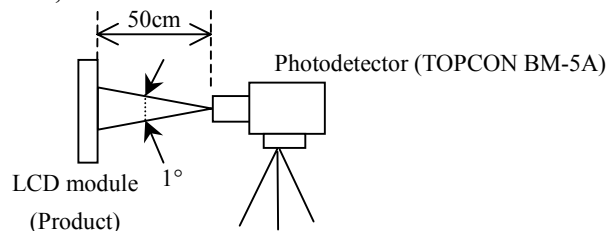

Note2: See "4.10.2 Definition of contrast ratio".

Note3: See "4.10.3 Definition of luminance uniformity".

Note4: These coordinates are found on CIE 1931 chromaticity diagram.

Note5: Product surface temperature: TopF = 25°C

Note6: See "4.10.4 Definition of response times".

Note7: See "4.10.5 Definition of viewing angles".

4.10.2 Definition of contrast ratio

The contrast ratio is calculated by using the following formula.


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance of white screen}}{\text{Luminance of black screen}}$$

4.10.3 Definition of luminance uniformity

The luminance uniformity is calculated by using following formula.


$$\text{Luminance uniformity (LU)} = \frac{\text{Maximum luminance from ① to ⑤}}{\text{Minimum luminance from ① to ⑤}}$$

The luminance is measured at near the 5 points shown below.

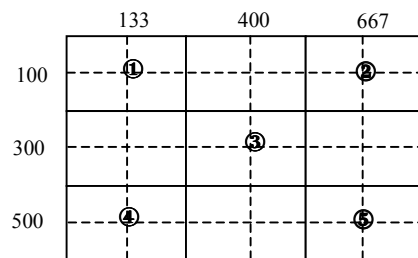


4.10.4 Definition of response times

Response time is measured, the luminance changes from "black" to "white", or "white" to "black" on the same screen point, by photo-detector. Ton is the time it takes the luminance change from 10% up to 90%. Also Toff is the time it takes the luminance change from 90% down to 10% (See the following diagram.).

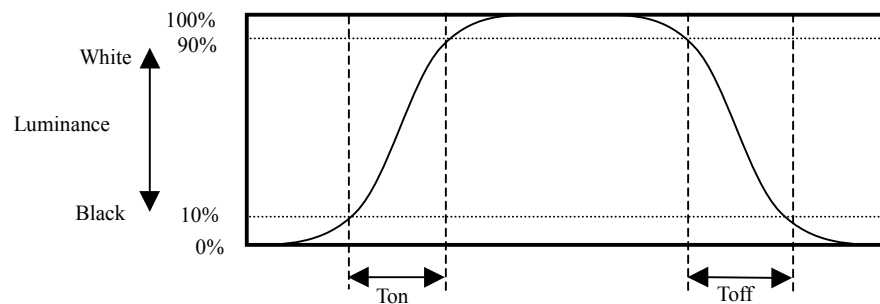

4.10.5 Definition of viewing angles

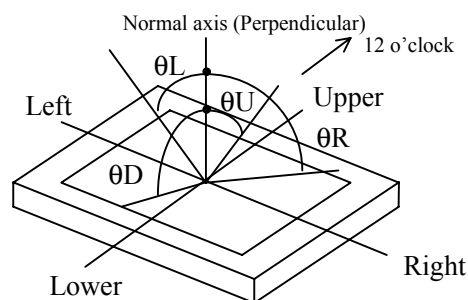


5. RELIABILITY TESTS

Test item	Condition	Judgement
High temperature and humidity (Operation)	① $60 \pm 2^{\circ}\text{C}$, RH = 60%, 240hours ② Display data is black.	No display malfunctions Note1
Heat cycle (Operation)	① $0 \pm 3^{\circ}\text{C} \dots 1\text{hour}$ $55 \pm 3^{\circ}\text{C} \dots 1\text{hour}$ ② 50cycles, 4hours/cycle ③ Display data is black.	
Thermal shock (Non operation)	① $-20 \pm 3^{\circ}\text{C} \dots 30\text{minutes}$ $60 \pm 3^{\circ}\text{C} \dots 30\text{minutes}$ ② 100cycles, 1hour/cycle ③ Temperature transition time is within 5 minutes.	
ESD (Operation)	① 150pF, 150Ω, $\pm 10\text{kV}$ ② 9 places on a panel surface Note2 ③ 10 times each places at 1 sec interval	
Dust (Operation)	① 15 kinds of dust (by JIS-Z8901) ② 15 seconds stir ③ 8 times repeat at 1 hour interval	
Vibration (Non operation)	① 5 to 100Hz, 11.76m/s^2 ② 1 minute/cycle ③ X, Y, Z direction ④ 10 times each directions	No display malfunctions Note1 No physical damages
Mechanical shock (Non operation)	① 539m/s^2 , 11ms ② $\pm X$, $\pm Y$, $\pm Z$ direction ③ 3 times each directions	

Note1: Display functions are checked under the same conditions as product inspection.

Note2: See the following figure for discharge points.

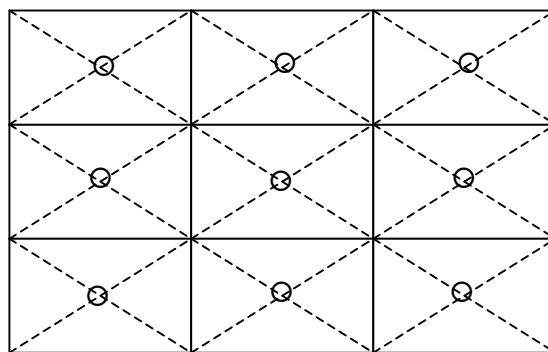

6. PRECAUTIONS

6.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning. **Be sure to read "6.2 CAUTIONS", after understanding this contents!**



This sign has the meaning that customer will be injured by himself, if customer has wrong operations.

6.2 CAUTIONS



- * Pay attention to burn injury for the working backlight! It may be over 35°C from ambient temperature.
- * Do not shock and press the LCD panel and the backlight! Danger of breaking, because they are made of glass. (Shock: To be not greater 539m/s² and to be not greater 11ms, Pressure: To be not greater 19.6N)

6.3 ATTENTIONS

6.3.1 Handling of the product

- ① Take hold of both ends without touch the circuit board when customer pulls out products (LCD modules) from inner packing box. If customer touches it, products may be broken down or out of adjustment, because of stress to mounting parts.
- ② Do not hook cables nor pull connection cables such as flexible cable and so on, for fear of damage.
- ③ If customer puts down the product temporarily, the product puts on flat subsoil as a display side turns down.
- ④ Take the measures of electrostatic discharge such as earth band, ionic shower and so on, when customer deals with the product, because products may be damaged by electrostatic.
- ⑤ The torque for mounting screws must never exceed 0.29N·m. Higher torque values might result in distortion of the bezel.
- ⑥ Do not press or rub on the sensitive display surface. If customer clean on the panel surface, NEC Corporation recommends using the cloth with ethanolic liquid such as screen cleaner for LCD.
- ⑦ Do not push-pull the interface connectors while the product is working, because wrong power sequence may break down the product.
- ⑧ Do not give the shock or vibration to the normal direction of a display surface, because image quality may fall.

6.3.2 Environment

- ① Do not operate in dewdrop atmosphere and corrosive gases.
- ② Do not operate or store in high temperature or high humidity atmosphere. Keep the product in antistatic pouch in room temperature, because of avoidance for dusts and sunlight, if customer stores the product.
- ③ Do not operate in high magnetic field. Circuit boards may be broken down by it.

- ④ Use an original protection sheet on the product surface (polarizer). Adhesive type protection sheet should be avoided, because it may change color or properties of the polarizer.

6.3.3 Characteristics

The following items are neither defects nor failures.


- ① Response time, luminance and color may be changed by ambient temperature.
- ② The LCD may be seemed luminance non-uniformity, flicker, vertical seam or small spot by display patterns.
- ③ Optical characteristics (e.g. luminance, display uniformity, etc.) gradually is going to change depending on operating time, and especially low temperature, because the LCD has cold cathode fluorescent lamps.
- ④ Do not display the fixed pattern for a long time because it may cause image sticking. Use a screen saver, if the fixed pattern is displayed on the screen.
- ⑤ The display color may be changed by viewing angle because of the use of condenser sheet in the backlight unit.
- ⑥ Optical characteristics may be changed by input signal timings.

6.3.4 Other


- ① All GND, backlight inverter ground (GNDB), VCC and backlight inverter power supply voltage (VDDB) terminals should be used without a non-connected line.
- ② Do not disassemble a product or adjust volume without permission of NEC Corporation.
- ③ See "REPLACEMENT MANUAL FOR LAMPHOLDER", if customer would like to replace backlight lamps.
- ④ Pay attention not to insert waste materials inside of products, if customer uses screwnails.
- ⑤ Pack the product with original shipping package, because of avoidance of some damages during transportation, when customer returns it to NEC Corporation for repair and so on.

7. OUTLINE DRAWINGS

7.1 FRONT VIEW

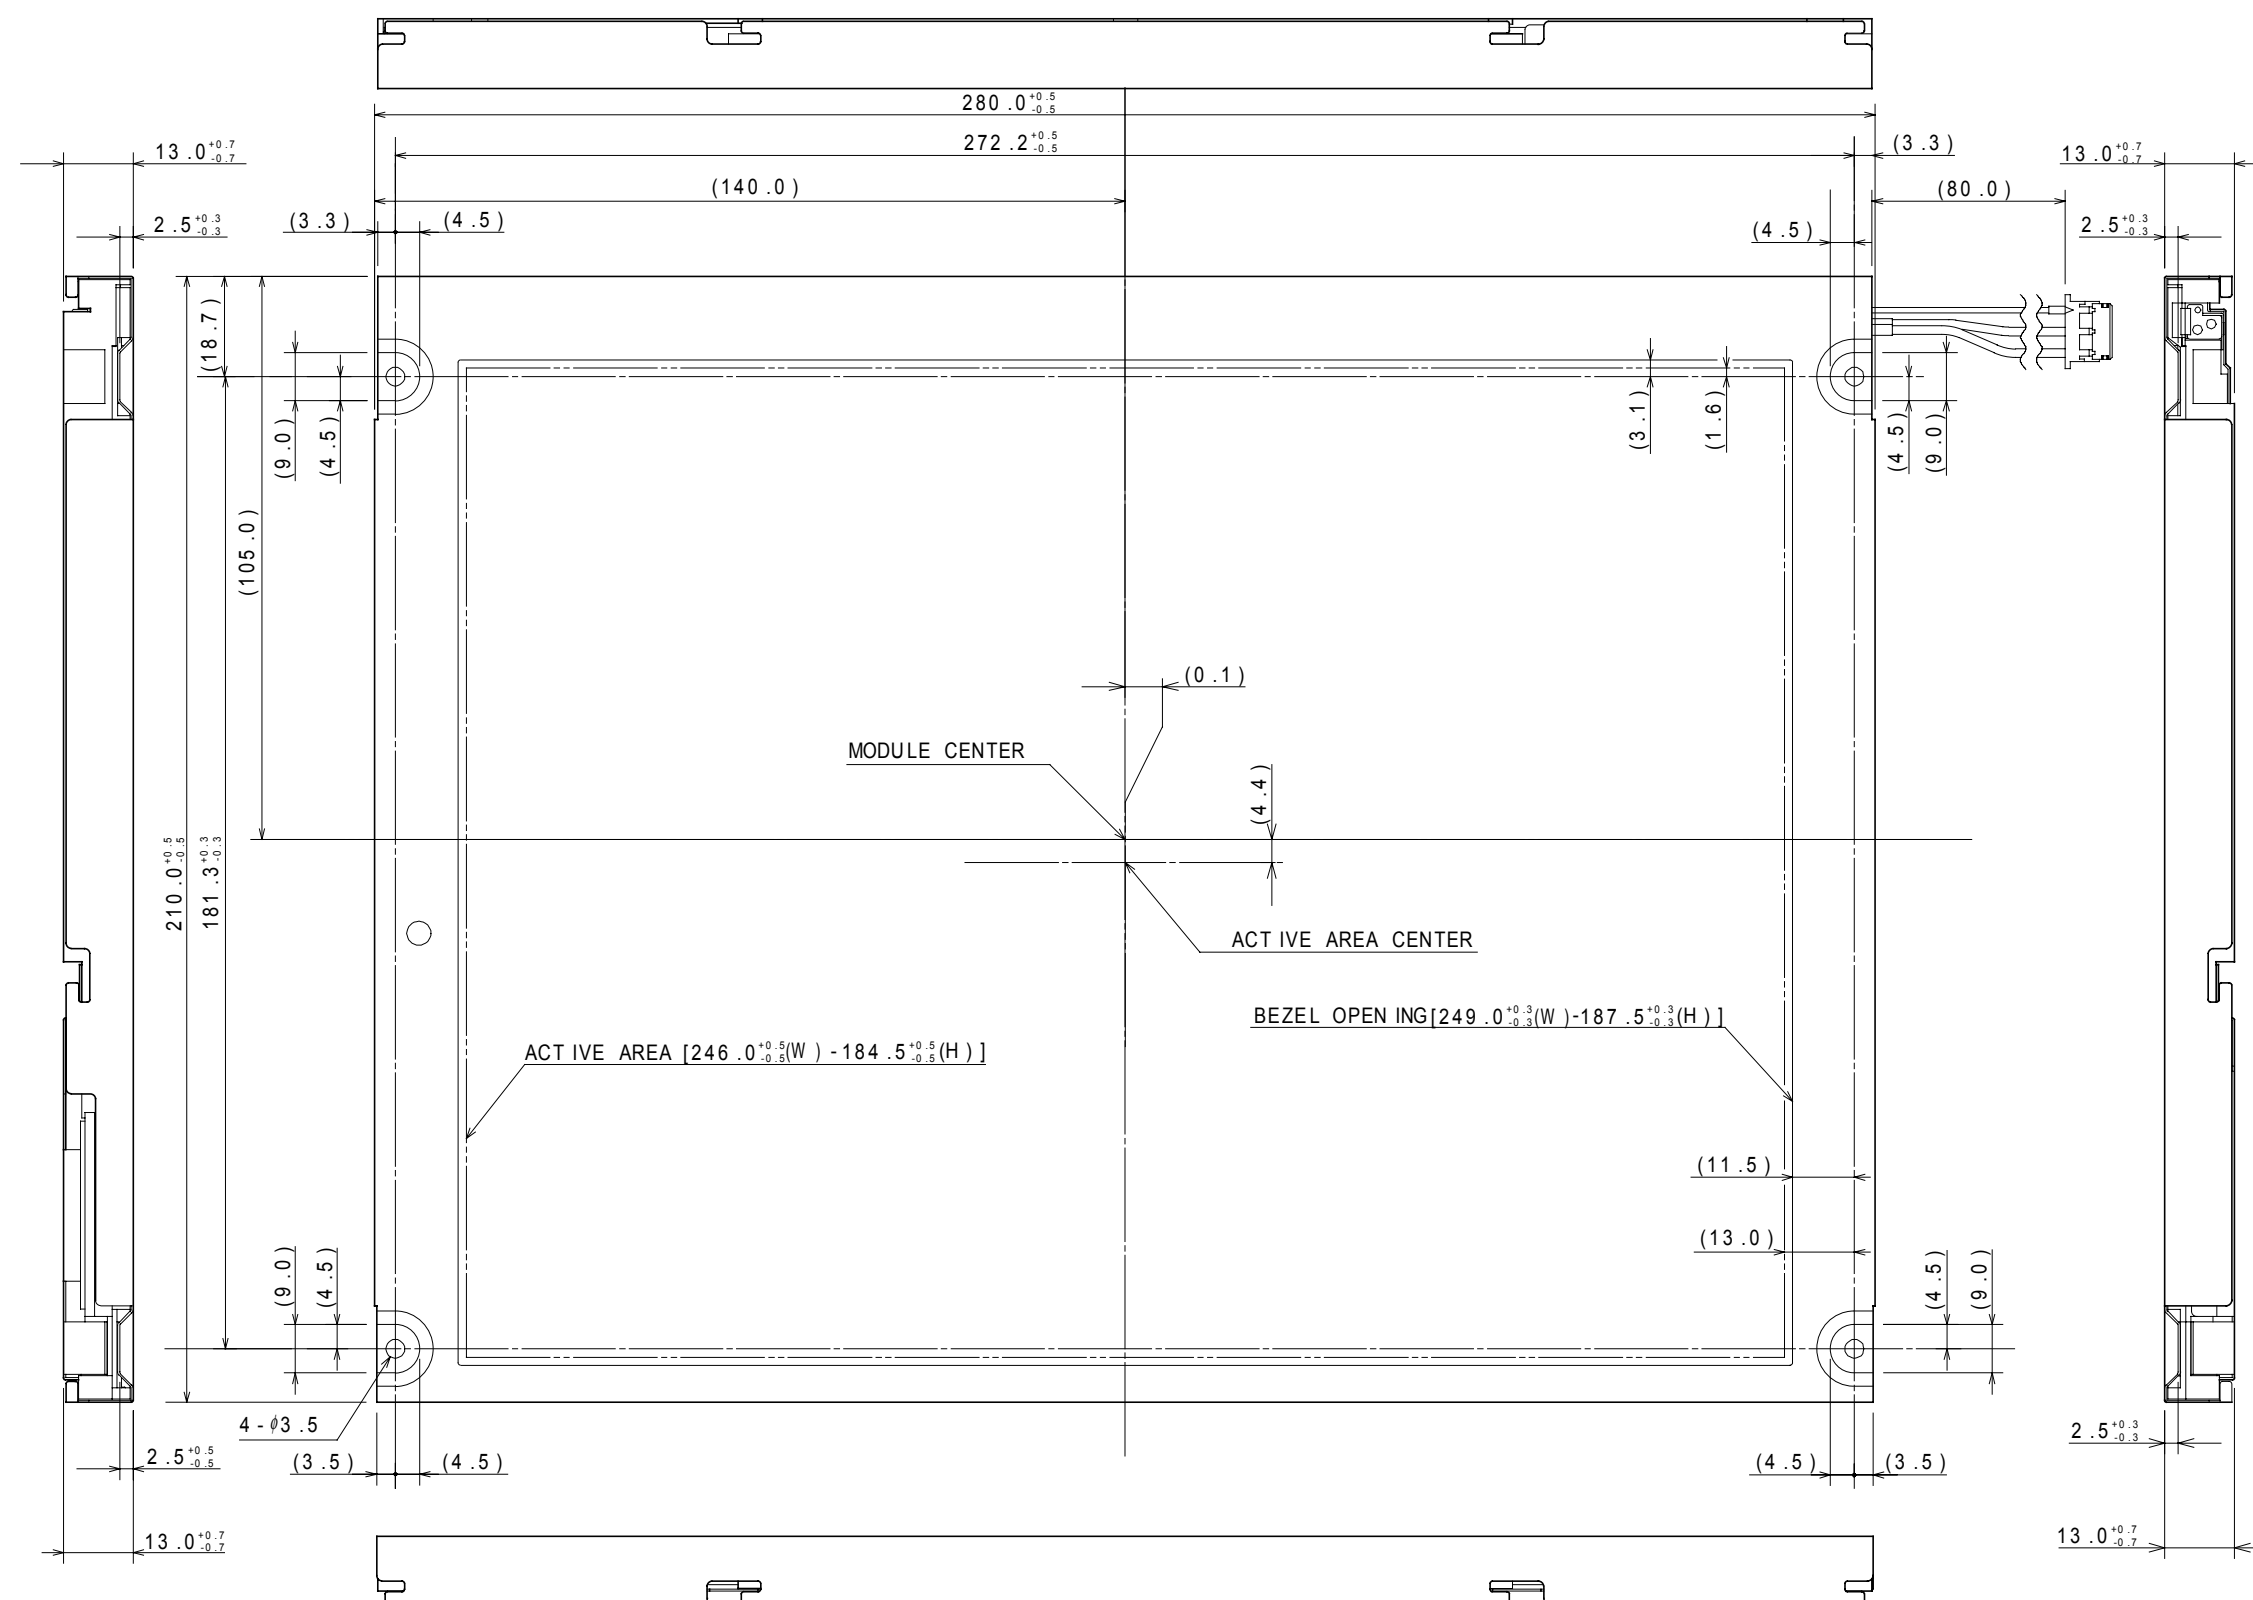

7.2 REAR VIEW

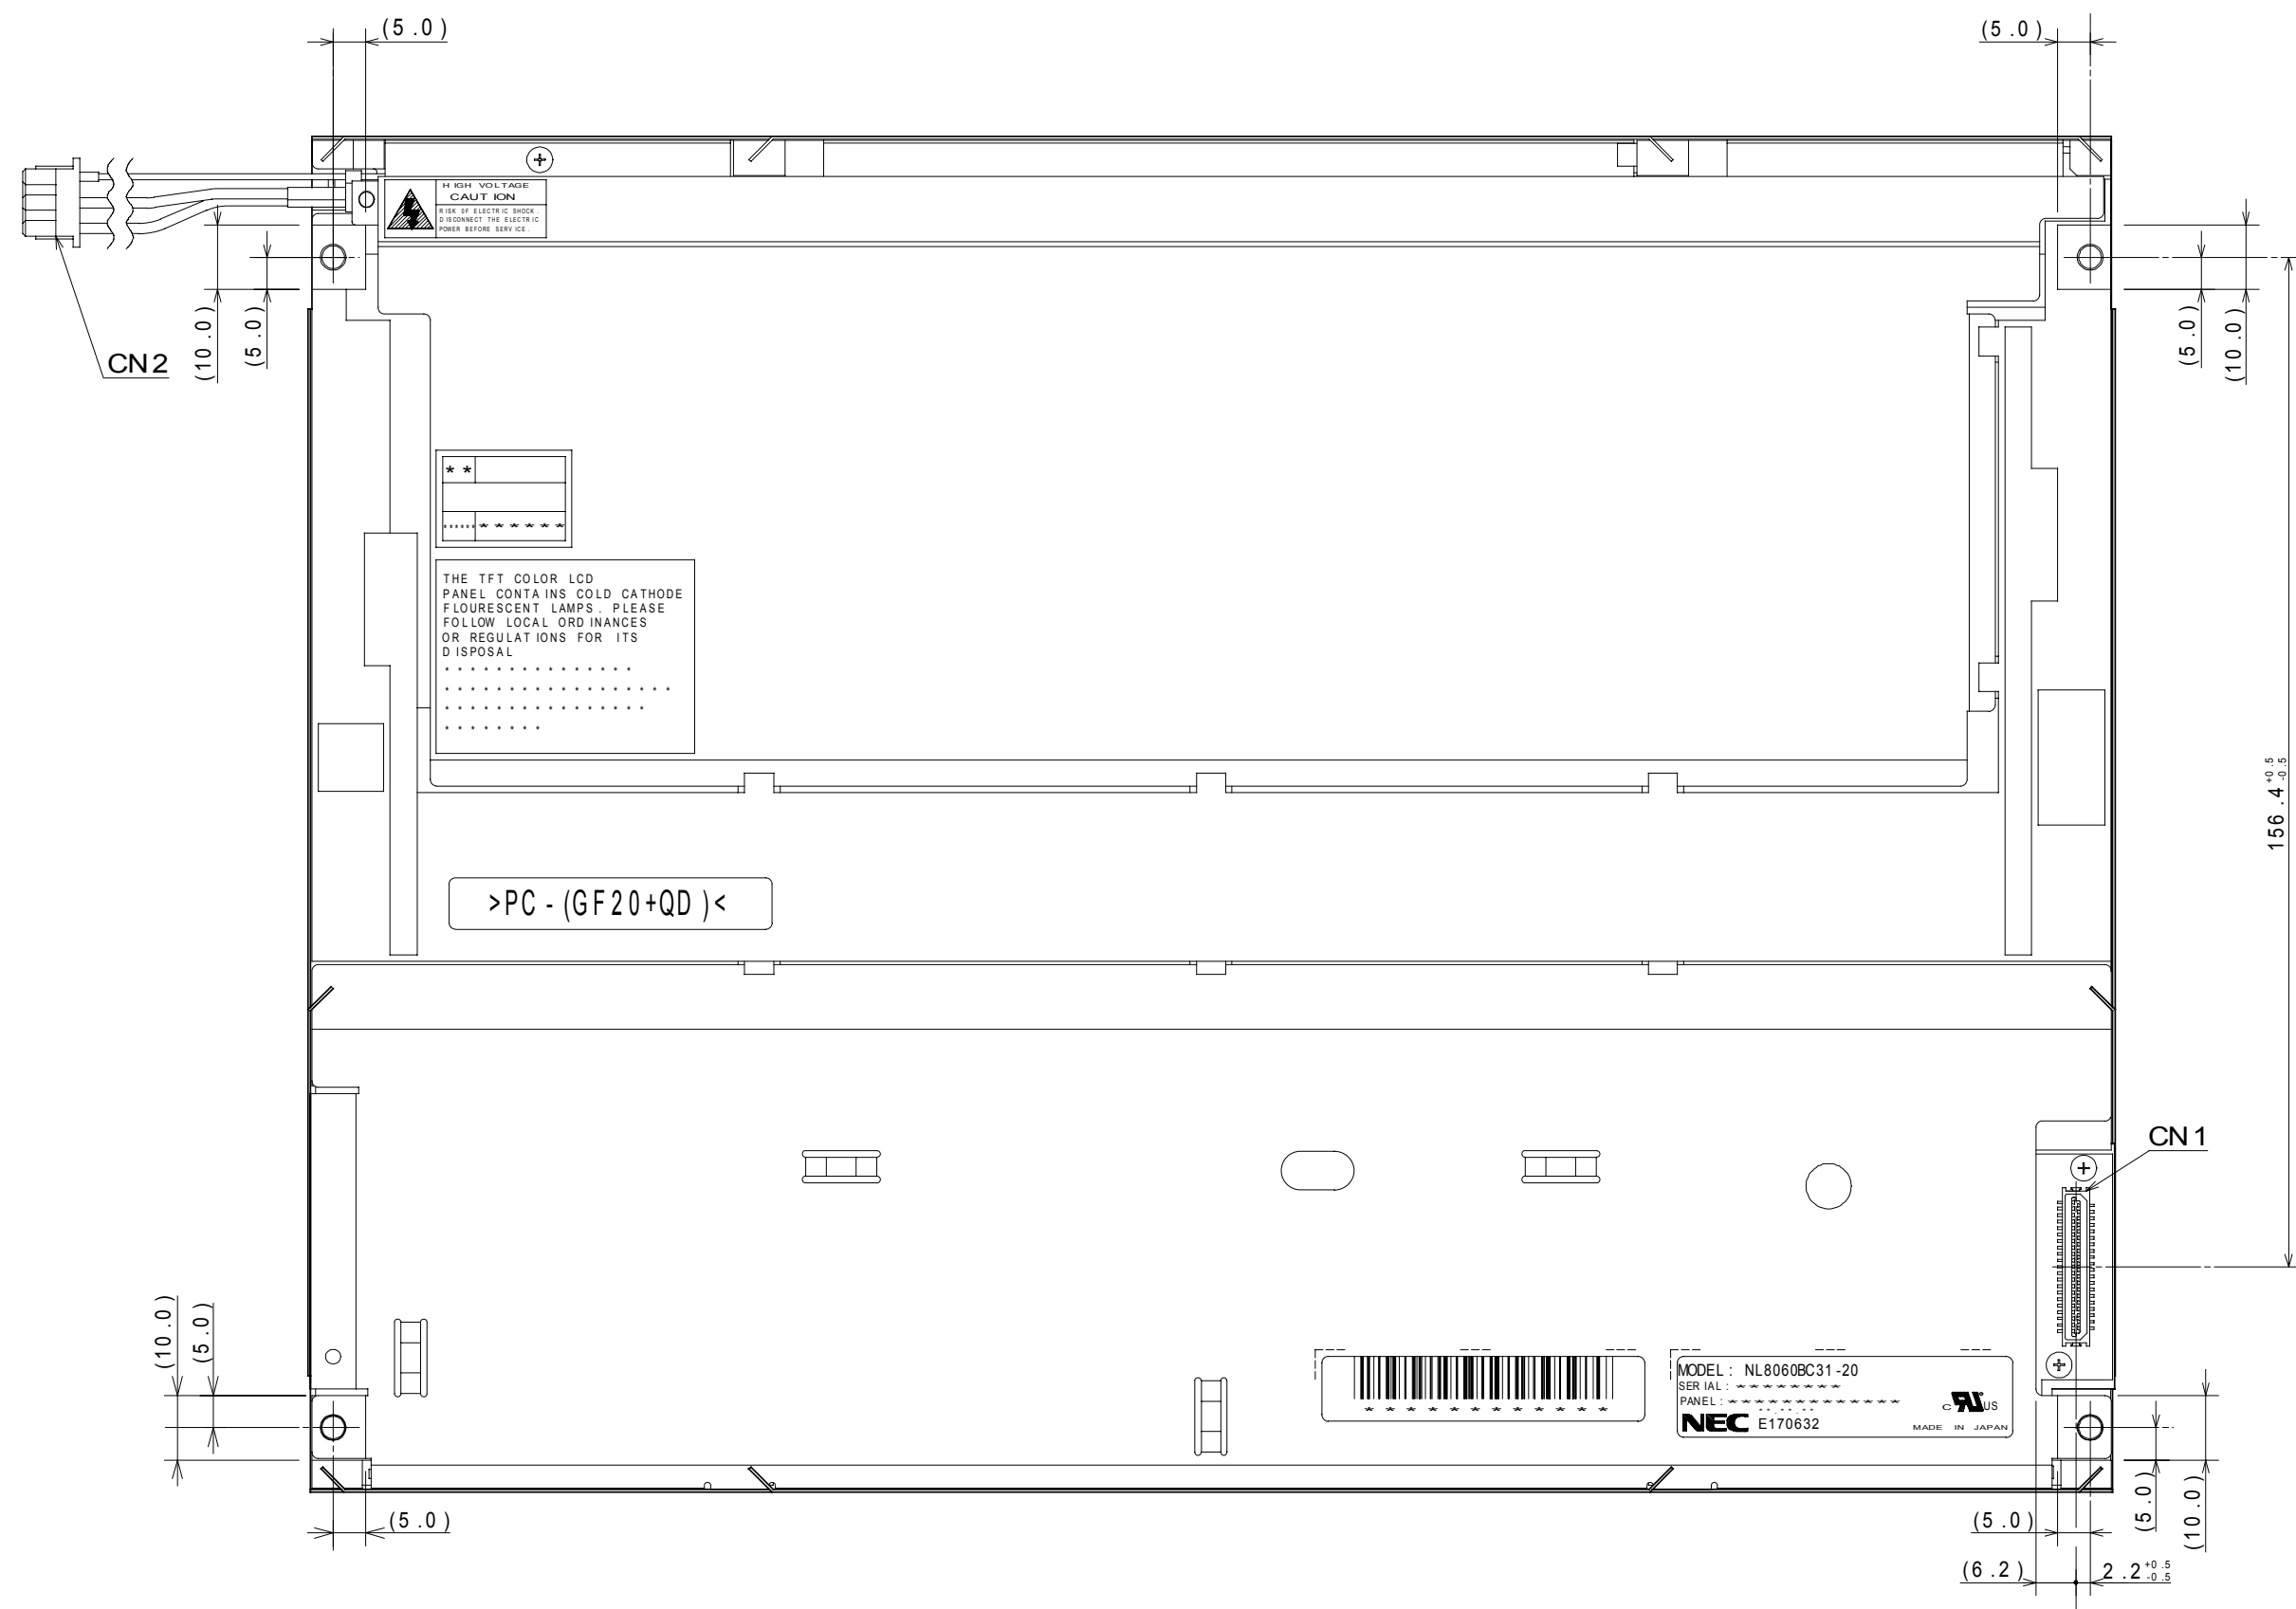

Unit: mm

REVISION HISTORY

The inside of latest specifications is revised to the clerical error, undecided mater (TBD, etc.) and the major improvement of previous edition. Only a changed part such as functions, characteristic value and so on that may affect a design of customers, are described especially below.

Edition	Document number	Prepared date	Revision contents and writer
1st edition	DOD - M - 0297	May. 14, 2001	Revision contents New issue Writer Approved by _____ Checked by _____ Prepared by _____ H. OHKUBO _____ T. TAKEMOTO _____
2nd edition	DOD - M - 0665	Oct. 3, 2001	Revision contents • Change part (Before-1st edition → After-2nd edition) (1) <i>page 5/25</i> 2. GENERAL SPECIFICATIONS <i>Weight</i> 800 g (Typ.) <i>Contrast ratio</i> 250:1 (Typ.) → <i>page 6/28</i> 2. GENERAL SPECIFICATIONS <i>Weight</i> 760 g (typ.) <i>Contrast ratio</i> 400:1 (typ.) (2) <i>page 7/25</i> 4. DETAILED SPECIFICATIONS <i>Weight</i> 800 (Typ.) 830 (Max.) → <i>page 8/28</i> 4.1 MECHANICAL SPECIFICATIONS <i>Weight</i> 760 g (typ.), 800 (max.) (3) <i>page 7/25</i> 6. ELECTRICAL CHARACTERISTICS <i>Supply current</i> (Typ.) 300 mA (VCC = 3.3V), 220 mA (VCC = 5.0V) → <i>page 9/28</i> 4.3.1 Driving for LCD panel signal processing board <i>Supply current</i> (Typ.) 400 mA (VCC = 3.3V), 300 mA (VCC = 5.0V)

REVISION HISTORY

Edition	Document number	Prepared date	Revision contents and writer																																																																																																																																																																																																																																								
2nd edition	DOD - M - 0665	Oct. 3, 2001	(4) page 18/25 12. OPTICAL CHARACTERISTICS (Ta = 25 °C, Note 1) <table><tr><th>Parameters</th><th>Symbols</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Remarks</th></tr><tr><td>Contrast ratio</td><td>CR</td><td>Note 4</td><td>200</td><td>250</td><td>-</td><td>-</td><td>Note 3</td></tr><tr><td>Luminance</td><td>Lumax</td><td>White, Note 4</td><td>200</td><td>250</td><td>-</td><td>cd/m²</td><td>Note 2</td></tr><tr><td>Luminance uniformity</td><td>-</td><td>Max. / Min.</td><td>-</td><td>-</td><td>1.40</td><td>-</td><td>Note 7</td></tr></table> Reference data (Ta = 25 °C, Note 1) <table><tr><th>Parameters</th><th>Symbols</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Remarks</th></tr><tr><td>Color gamut</td><td>C</td><td>To NTSC</td><td>35</td><td>43</td><td>-</td><td>%</td><td>Note 4</td></tr><tr><td rowspan="4">Viewing Angle Range</td><td rowspan="2">Horizontal</td><td>θx+</td><td>70</td><td>80</td><td>-</td><td>deg.</td><td rowspan="4">Note 5</td></tr><tr><td>θx-</td><td>70</td><td>80</td><td>-</td><td>deg.</td></tr><tr><td rowspan="2">Vertical</td><td>θy+</td><td>70</td><td>80</td><td>-</td><td>deg.</td></tr><tr><td>θy-</td><td>70</td><td>80</td><td>-</td><td>deg.</td></tr><tr><td rowspan="2">Response time (Module surface temperature = 28°C)</td><td>Ton</td><td>“Black” to “White”</td><td>-</td><td>50</td><td>70</td><td>ms</td><td rowspan="2">Note 6</td></tr><tr><td>Toff</td><td>“White” to “Black”</td><td>-</td><td>50</td><td>80</td><td>ms</td></tr></table> → page 20/28 4.10.1 Optical characteristics <table><tr><th>Parameter</th><th>Note1</th><th>Condition</th><th>Symbol</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Remarks</th></tr><tr><td>Contrast ratio</td><td></td><td>White/Black at center θR = 0°, θL = 0°, θU = 0°, θD = 0°</td><td>CR</td><td>200</td><td>400</td><td>-</td><td>-</td><td>Note2</td></tr><tr><td>Luminance</td><td></td><td>White at center θR = 0°, θL = 0°, θU = 0°, θD = 0°</td><td>L</td><td>200</td><td>250</td><td>-</td><td>cd/m²</td><td>-</td></tr><tr><td>Luminance uniformity</td><td></td><td>-</td><td>LU</td><td>-</td><td>1.25</td><td>1.40</td><td>-</td><td>Note3</td></tr><tr><td rowspan="8">Chromaticity</td><td rowspan="2">White</td><td>x coordinate</td><td>Wx</td><td>-</td><td>TBD</td><td>-</td><td>-</td><td rowspan="8">Note4</td></tr><tr><td>y coordinate</td><td>Wy</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td rowspan="2">Red</td><td>x coordinate</td><td>Rx</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td>y coordinate</td><td>Ry</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td rowspan="2">Green</td><td>x coordinate</td><td>Gx</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td>y coordinate</td><td>Gy</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td rowspan="2">Blue</td><td>x coordinate</td><td>Bx</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td>y coordinate</td><td>By</td><td>-</td><td>TBD</td><td>-</td><td>-</td></tr><tr><td>Color gamut</td><td></td><td>θR = 0°, θL = 0°, θU = 0°, θD = 0° at center, against NTSC color space</td><td>C</td><td>-</td><td>40</td><td>-</td><td>%</td><td></td></tr><tr><td rowspan="2">Response time</td><td></td><td>White to Black</td><td>Ton</td><td>-</td><td>40</td><td>TBD</td><td>ms</td><td rowspan="2">Note5 Note6</td></tr><tr><td></td><td>Black to White</td><td>Toff</td><td>-</td><td>40</td><td>TBD</td><td>ms</td></tr><tr><td rowspan="4">Viewing angle</td><td rowspan="4">CR = 10</td><td>Right</td><td>θU = 0°, θD = 0°</td><td>θR</td><td>-</td><td>80</td><td>-</td><td>°</td><td rowspan="4">Note7</td></tr><tr><td>Left</td><td>θU = 0°, θD = 0°</td><td>θL</td><td>-</td><td>80</td><td>-</td><td>°</td></tr><tr><td>Up</td><td>θR = 0°, θL = 0°</td><td>θU</td><td>-</td><td>80</td><td>-</td><td>°</td></tr><tr><td>Down</td><td>θR = 0°, θL = 0°</td><td>θD</td><td>-</td><td>80</td><td>-</td><td>°</td></tr></table> Signature of writer Approved by Checked by Prepared by T. ITO A. SAWADA	Parameters	Symbols	Conditions	Min.	Typ.	Max.	Unit	Remarks	Contrast ratio	CR	Note 4	200	250	-	-	Note 3	Luminance	Lumax	White, Note 4	200	250	-	cd/m²	Note 2	Luminance uniformity	-	Max. / Min.	-	-	1.40	-	Note 7	Parameters	Symbols	Conditions	Min.	Typ.	Max.	Unit	Remarks	Color gamut	C	To NTSC	35	43	-	%	Note 4	Viewing Angle Range	Horizontal	θx+	70	80	-	deg.	Note 5	θx-	70	80	-	deg.	Vertical	θy+	70	80	-	deg.	θy-	70	80	-	deg.	Response time (Module surface temperature = 28°C)	Ton	“Black” to “White”	-	50	70	ms	Note 6	Toff	“White” to “Black”	-	50	80	ms	Parameter	Note1	Condition	Symbol	Min.	Typ.	Max.	Unit	Remarks	Contrast ratio		White/Black at center θR = 0°, θL = 0°, θU = 0°, θD = 0°	CR	200	400	-	-	Note2	Luminance		White at center θR = 0°, θL = 0°, θU = 0°, θD = 0°	L	200	250	-	cd/m²	-	Luminance uniformity		-	LU	-	1.25	1.40	-	Note3	Chromaticity	White	x coordinate	Wx	-	TBD	-	-	Note4	y coordinate	Wy	-	TBD	-	-	Red	x coordinate	Rx	-	TBD	-	-	y coordinate	Ry	-	TBD	-	-	Green	x coordinate	Gx	-	TBD	-	-	y coordinate	Gy	-	TBD	-	-	Blue	x coordinate	Bx	-	TBD	-	-	y coordinate	By	-	TBD	-	-	Color gamut		θR = 0°, θL = 0°, θU = 0°, θD = 0° at center, against NTSC color space	C	-	40	-	%		Response time		White to Black	Ton	-	40	TBD	ms	Note5 Note6		Black to White	Toff	-	40	TBD	ms	Viewing angle	CR = 10	Right	θU = 0°, θD = 0°	θR	-	80	-	°	Note7	Left	θU = 0°, θD = 0°	θL	-	80	-	°	Up	θR = 0°, θL = 0°	θU	-	80	-	°	Down	θR = 0°, θL = 0°	θD	-	80	-	°
Parameters	Symbols	Conditions	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																																																																																																																				
Contrast ratio	CR	Note 4	200	250	-	-	Note 3																																																																																																																																																																																																																																				
Luminance	Lumax	White, Note 4	200	250	-	cd/m²	Note 2																																																																																																																																																																																																																																				
Luminance uniformity	-	Max. / Min.	-	-	1.40	-	Note 7																																																																																																																																																																																																																																				
Parameters	Symbols	Conditions	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																																																																																																																				
Color gamut	C	To NTSC	35	43	-	%	Note 4																																																																																																																																																																																																																																				
Viewing Angle Range	Horizontal	θx+	70	80	-	deg.	Note 5																																																																																																																																																																																																																																				
		θx-	70	80	-	deg.																																																																																																																																																																																																																																					
	Vertical	θy+	70	80	-	deg.																																																																																																																																																																																																																																					
		θy-	70	80	-	deg.																																																																																																																																																																																																																																					
Response time (Module surface temperature = 28°C)	Ton	“Black” to “White”	-	50	70	ms	Note 6																																																																																																																																																																																																																																				
	Toff	“White” to “Black”	-	50	80	ms																																																																																																																																																																																																																																					
Parameter	Note1	Condition	Symbol	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																																																																																																																			
Contrast ratio		White/Black at center θR = 0°, θL = 0°, θU = 0°, θD = 0°	CR	200	400	-	-	Note2																																																																																																																																																																																																																																			
Luminance		White at center θR = 0°, θL = 0°, θU = 0°, θD = 0°	L	200	250	-	cd/m²	-																																																																																																																																																																																																																																			
Luminance uniformity		-	LU	-	1.25	1.40	-	Note3																																																																																																																																																																																																																																			
Chromaticity	White	x coordinate	Wx	-	TBD	-	-	Note4																																																																																																																																																																																																																																			
		y coordinate	Wy	-	TBD	-	-																																																																																																																																																																																																																																				
	Red	x coordinate	Rx	-	TBD	-	-																																																																																																																																																																																																																																				
		y coordinate	Ry	-	TBD	-	-																																																																																																																																																																																																																																				
	Green	x coordinate	Gx	-	TBD	-	-																																																																																																																																																																																																																																				
		y coordinate	Gy	-	TBD	-	-																																																																																																																																																																																																																																				
	Blue	x coordinate	Bx	-	TBD	-	-																																																																																																																																																																																																																																				
		y coordinate	By	-	TBD	-	-																																																																																																																																																																																																																																				
Color gamut		θR = 0°, θL = 0°, θU = 0°, θD = 0° at center, against NTSC color space	C	-	40	-	%																																																																																																																																																																																																																																				
Response time		White to Black	Ton	-	40	TBD	ms	Note5 Note6																																																																																																																																																																																																																																			
		Black to White	Toff	-	40	TBD	ms																																																																																																																																																																																																																																				
Viewing angle	CR = 10	Right	θU = 0°, θD = 0°	θR	-	80	-	°	Note7																																																																																																																																																																																																																																		
		Left	θU = 0°, θD = 0°	θL	-	80	-	°																																																																																																																																																																																																																																			
		Up	θR = 0°, θL = 0°	θU	-	80	-	°																																																																																																																																																																																																																																			
		Down	θR = 0°, θL = 0°	θD	-	80	-	°																																																																																																																																																																																																																																			