

# RM400HA-24S

HIGH SPEED SWITCHING USE  
INSULATED TYPE

## RM400HA-24S



- **Idc** DC current ..... **400A**
- **VRRM** Repetitive peak reverse voltage ..... **1200V**
- **trr** Reverse recovery time ..... **0.4μs**
- **Insulated Type**
- **UL Recognized**




Yellow Card No. E80276 (N)  
File No. E80271

## APPLICATION

Free wheel use, Welders

## OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

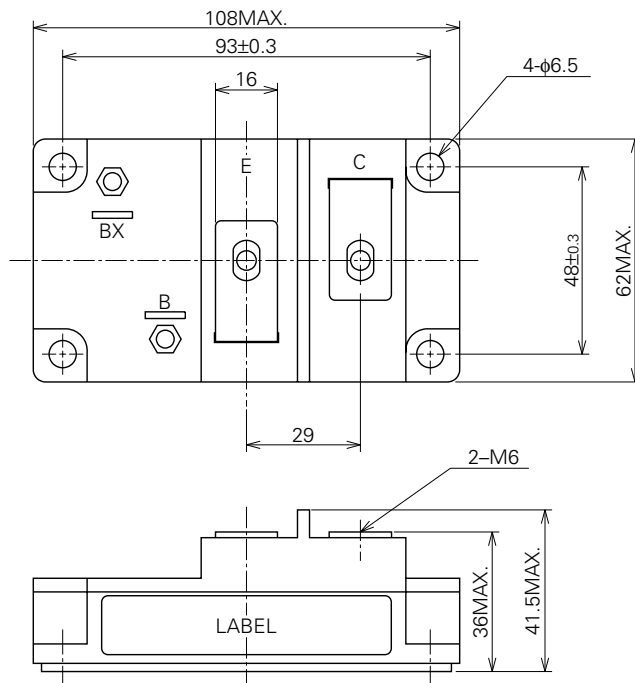

# RM400HA-24S

HIGH SPEED SWITCHING USE  
INSULATED TYPE

## ABSOLUTE MAXIMUM RATINGS (T<sub>j</sub>=25°C)

| Symbol              | Parameter                           | Voltage class | Unit |
|---------------------|-------------------------------------|---------------|------|
|                     |                                     | 24            |      |
| V <sub>RRM</sub>    | Repetitive peak reverse voltage     | 1200          | V    |
| V <sub>DRM</sub>    | Non-repetitive peak reverse voltage | 1250          | V    |
| V <sub>R</sub> (DC) | Reverse DC voltage                  | 960           | V    |

| Symbol                      | Parameter                              | Conditions                           | Ratings               | Unit             |
|-----------------------------|----------------------------------------|--------------------------------------|-----------------------|------------------|
| I <sub>DC</sub>             | DC current                             | Resistive load, T <sub>C</sub> =90°C | 400                   | A                |
| I <sub>FSM</sub>            | Surge (non-repetitive) forward current | One half cycle at 60Hz, peak value   | 8000                  | A                |
| I <sup>2</sup> <sub>t</sub> | I <sup>2</sup> <sub>t</sub> for fusing | Value for one cycle surge current    | 2.6 × 10 <sup>5</sup> | A <sup>2</sup> s |
| T <sub>j</sub>              | Junction temperature                   |                                      | -40~+150              | °C               |
| T <sub>stg</sub>            | Storage temperature                    |                                      | -40~+125              | °C               |
| V <sub>iso</sub>            | Isolation voltage                      | Charged part to case                 | 2500                  | V                |
| —                           | Mounting torque                        | Main terminal screw M6               | 1.96~2.94             | N·m              |
|                             |                                        | Mounting screw M6                    | 1.96~2.94             | N·m              |
| —                           | Weight                                 | Typical value                        | 460                   | g                |

## ELECTRICAL CHARACTERISTICS


| Symbol                | Parameter                  | Test conditions                                                                   | Limits |      |      | Unit |
|-----------------------|----------------------------|-----------------------------------------------------------------------------------|--------|------|------|------|
|                       |                            |                                                                                   | Min.   | Typ. | Max. |      |
| I <sub>RRM</sub>      | Repetitive reverse current | T <sub>j</sub> =150°C, V <sub>RRM</sub> applied                                   | —      | —    | 50   | mA   |
| V <sub>FM</sub>       | Forward voltage            | T <sub>j</sub> =25°C, I <sub>FM</sub> =400A, Instantaneous meas.                  | —      | —    | 2.0  | V    |
| t <sub>rr</sub>       | Reverse recovery time      | I <sub>FM</sub> =400A, T <sub>j</sub> =25°C. di/dt=-800A/μs, V <sub>R</sub> =600V | —      | —    | 0.4  | μs   |
| Q <sub>rr</sub>       | Reverse recovery charge    |                                                                                   | —      | —    | 80   | μC   |
| R <sub>th</sub> (j-c) | Thermal resistance         | Junction to case                                                                  | —      | —    | 0.1  | °C/W |
| R <sub>th</sub> (c-f) | Contact thermal resistance | Case to fin, conductive grease applied                                            | —      | —    | 0.04 | °C/W |

# RM400HA-24S


HIGH SPEED SWITCHING USE  
INSULATED TYPE

## PERFORMANCE CURVES


MAXIMUM FORWARD CHARACTERISTIC

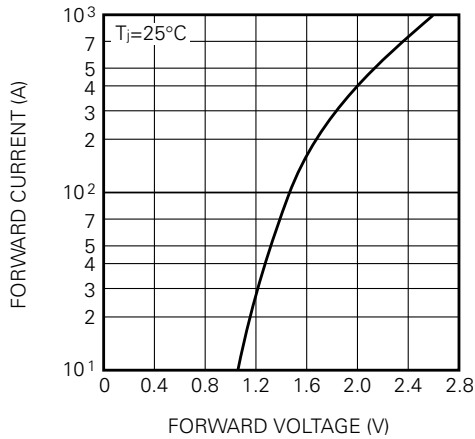


MAXIMUM TRANSIENT THERMAL IMPEDANCE (JUNCTION TO CASE)

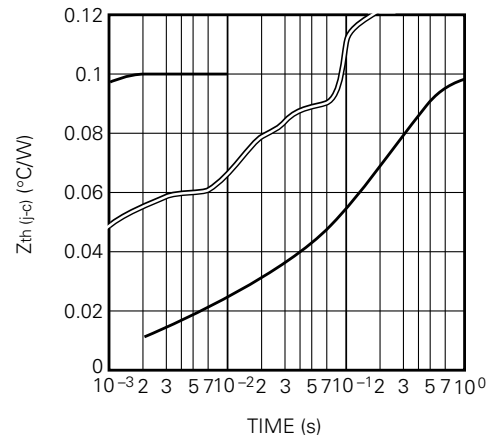

RATED SURGE (NON-REPETITIVE) FORWARD CURRENT

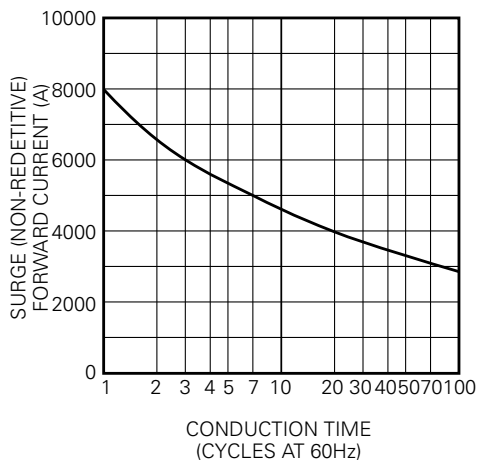

REVERSE RECOVERY CHARACTERISTICS VS. FORWARD CURRENT (TYPICAL)

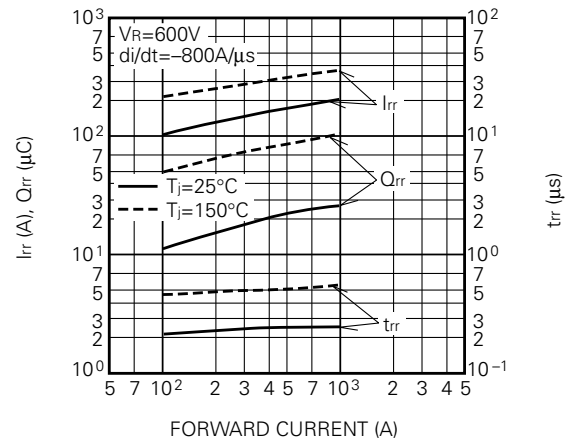

REVERSE RECOVERY CHARACTERISTICS VS. -di/dt (TYPICAL)

