


SKD 145

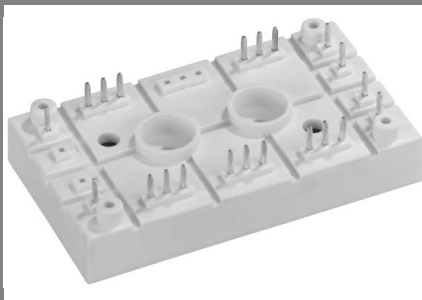

SEMIPONT[®] 5

Bridge Rectifiers

SKD 145

Target Data

Features


- Compact design
- SKiiP technology: thermal pressure contact, no base plate and no hard mould
- Two screws mounting
- Heat transfer and isolation through direct copper board (low R_{th})
- Low resistance in steady-state and high reliability
- High surge currents
- Up to 1800 V
- UL recognized, file no. E 63 532

Typical Applications*



- Three phase rectifiers for power supplies
- Input rectifiers for variable frequency drives
- Rectifiers for DC motor field supplies
- Battery charger rectifiers



V_{RSM} V	V_{RRM}, V_{DRM} V	$I_D = 140$ A (full conduction) ($T_s = 85$ °C)
1200	1200	SKD 145/12
1600	1600	SKD 145/16
1800	1800	SKD 145/18

Symbol	Conditions	Values	Units
I_D	$T_s = 85$ °C	140	A
I_{FSM}	$T_{vj} = 25$ °C; 10 ms $T_{vj} = 125$ °C; 10 ms	1800 1700	A A
i^2t	$T_{vj} = 25$ °C; 8,3 ... 10 ms $T_{vj} = 125$ °C; 8,3 ... 10 ms	16200 14450	A ² s A ² s
V_F $V_{(TO)}$ r_T I_{RD}	$T_{vj} = 125$ °C; $I_F = 150$ A $T_{vj} = 125$ °C $T_{vj} = 125$ °C $T_{vj} = 25$ °C; $V_{DD} = V_{DRM}$; $V_{RD} = V_{RRM}$	max. 1,3 max. 0,8 max. 4	V V mΩ mA mA
R_{thjh}	per diode	0,8	K/W K/W
T_{solder} T_{vj} T_{stg}	Terminals, max 10s	260 - 40 ... + 150 - 40 ... + 125	°C °C °C
V_{isol} M_s M_t m	a. c. 50 Hz; r.m.s.; 1 s / 1 min. to heatsink; SI units	3600 (3000) 2,5	V Nm Nm g
Case		G 57	

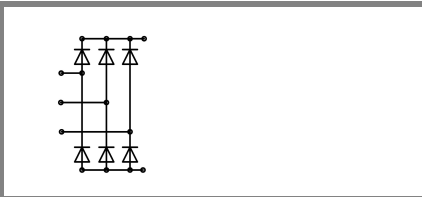

D

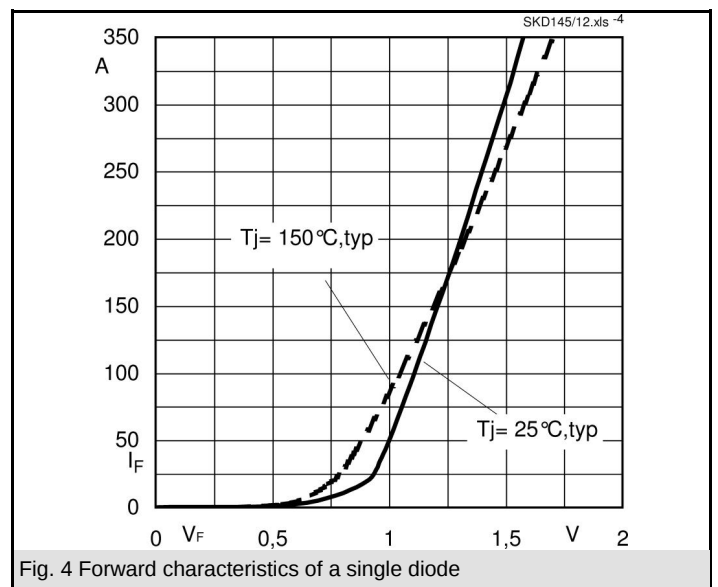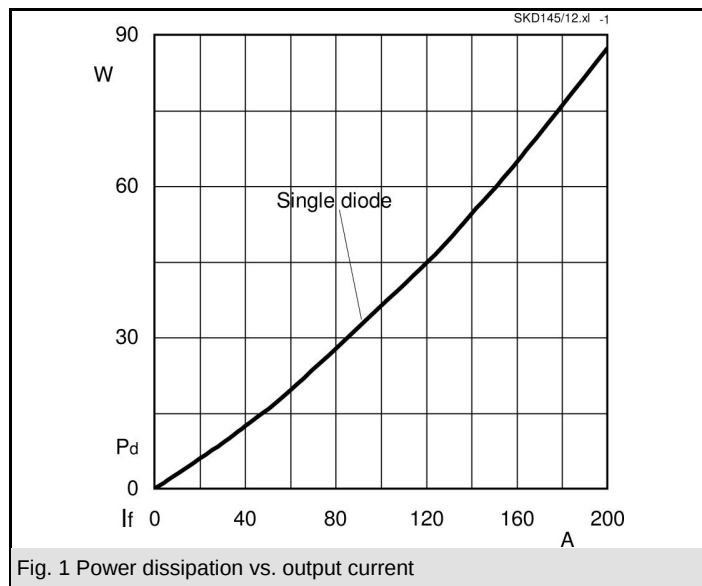

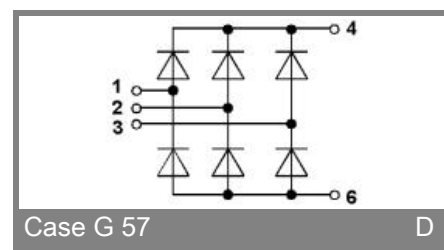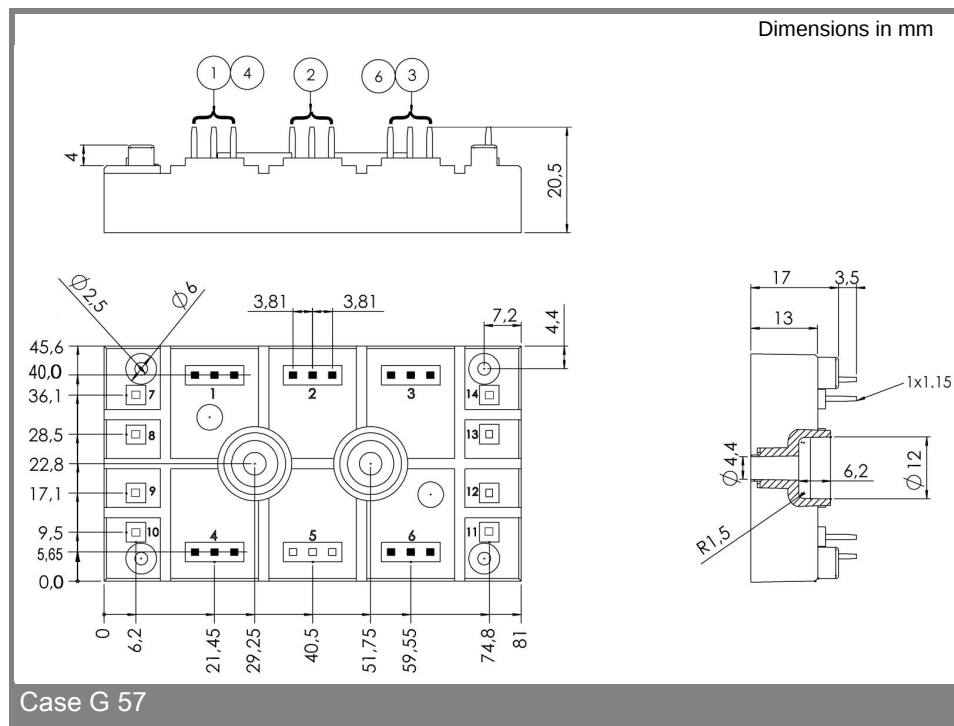

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.