



## SEMIPONT® 4

### Power Bridge Rectifiers

#### SKD 210

Preliminary Data

#### Features

- Robust plastic case with screw terminals
- Large, isolated base plate
- Blocking voltage up to 1800 V
- High surge currents
- Three phase bridge rectifier
- Easy chassis mounting
- UL recognition applied for file no. E 63 532


#### Typical Applications\*

- Three phase rectifiers for power supplies
- Input rectifiers for variable frequency drives
- Rectifiers for DC motor field supplies
- Battery charger rectifiers






<sup>1)</sup> Max. output current limited by the terminals: 220A rms


| $V_{RSM}$<br>V | $V_{RRM}, V_{DRM}$<br>V | $I_D = 210$ A (full conduction)<br>( $T_c = 99$ °C) |
|----------------|-------------------------|-----------------------------------------------------|
| 900            | 800                     | SKD 210/08                                          |
| 1300           | 1200                    | SKD 210/12                                          |
| 1700           | 1600                    | SKD 210/16                                          |
| 1900           | 1800                    | SKD 210/18                                          |

| Symbol        | Conditions                                                | Values            | Units |
|---------------|-----------------------------------------------------------|-------------------|-------|
| $I_D$         | $T_c = 100$ °C                                            | 207               | A     |
| $I_D$         | $T_c = 95$ °C                                             | 220 <sup>1)</sup> | A     |
| $I_{FSM}$     | $T_{vj} = 25$ °C; 10 ms                                   | 2000              | A     |
|               | $T_{vj} = 150$ °C; 10 ms                                  | 1600              | A     |
| $i^2t$        | $T_{vj} = 25$ °C; 8,3 ... 10 ms                           | 20000             | A²s   |
|               | $T_{vj} = 150$ °C; 8,3 ... 10 ms                          | 12800             | A²s   |
| $V_F$         | $T_{vj} = 25$ °C; $I_F = 300$ A                           | max. 1,65         | V     |
| $V_{(TO)}$    | $T_{vj} = 150$ °C                                         | max. 0,85         | V     |
| $r_T$         | $T_{vj} = 150$ °C                                         | max. 3            | mΩ    |
| $I_{RD}$      | $T_{vj} = 25$ °C; $V_{DD} = V_{DRM}$ ; $V_{RD} = V_{RRM}$ | max. 0,5          | mA    |
|               | $T_{vj} = 150$ °C; $V_{RD} = V_{RRM}$                     | 6                 | mA    |
| $R_{th(j-c)}$ | per diode                                                 | 0,5               | K/W   |
|               | total                                                     | 0,083             | K/W   |
| $R_{th(c-s)}$ | total                                                     | 0,03              | K/W   |
| $T_{vj}$      |                                                           | - 40 ... + 150    | °C    |
| $T_{stg}$     |                                                           | - 40 ... + 125    | °C    |
| $V_{isol}$    | a. c. 50 Hz; r.m.s.; 1 s / 1 min.                         | 3600 ( 3000 )     | V     |
| $M_s$         | to heatsink                                               | 5 ± 15 %          | Nm    |
| $M_t$         | to terminals                                              | 5 ± 15 %          | Nm    |
| $m$           |                                                           | 270               | g     |
| Case          |                                                           | G 37              |       |

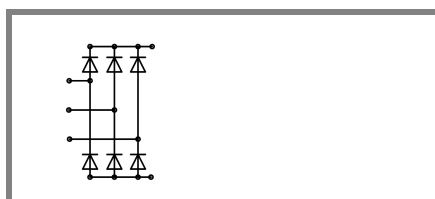

SKD

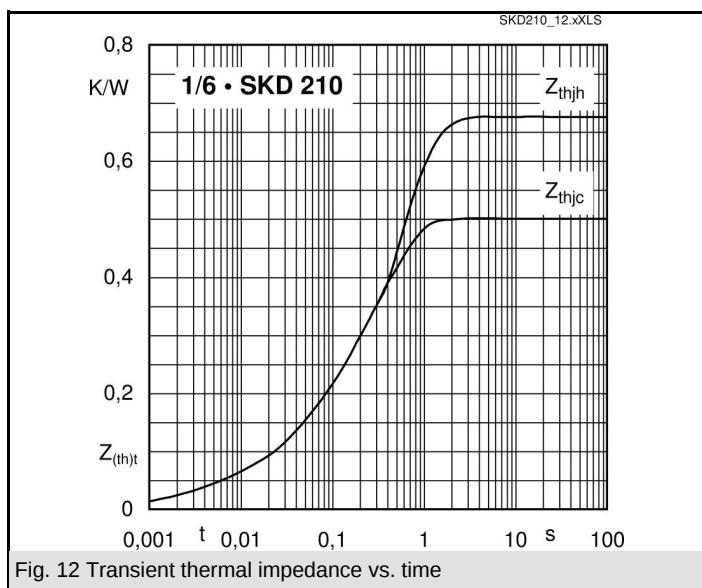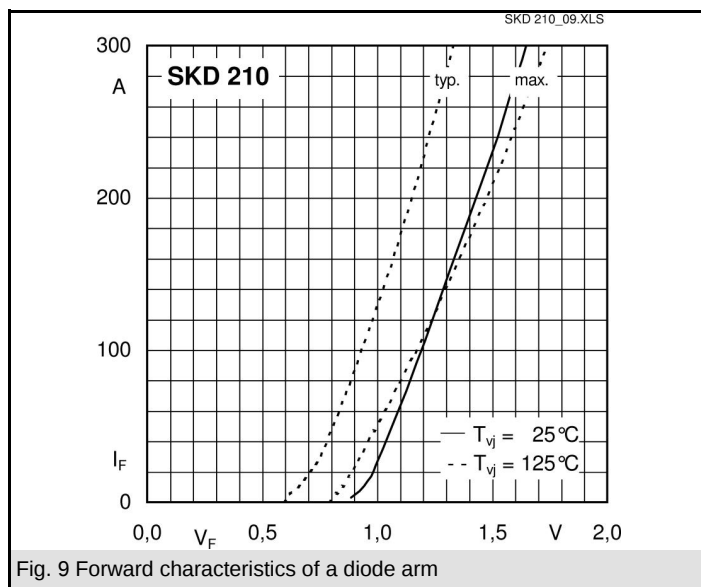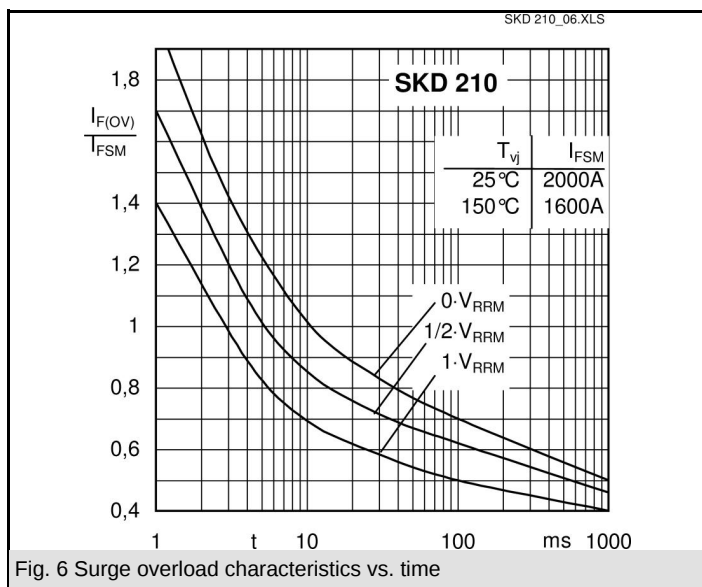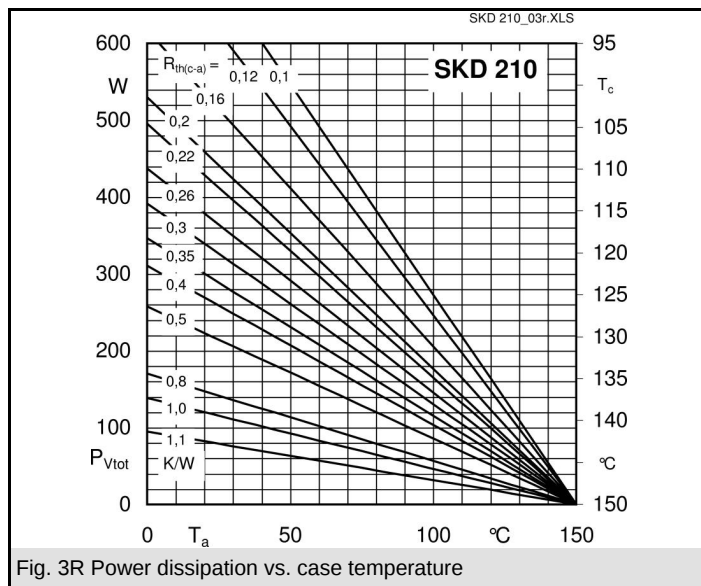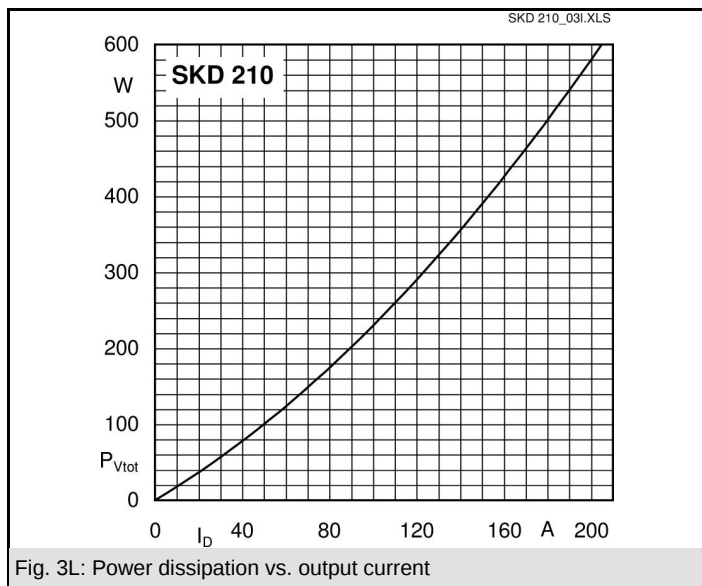

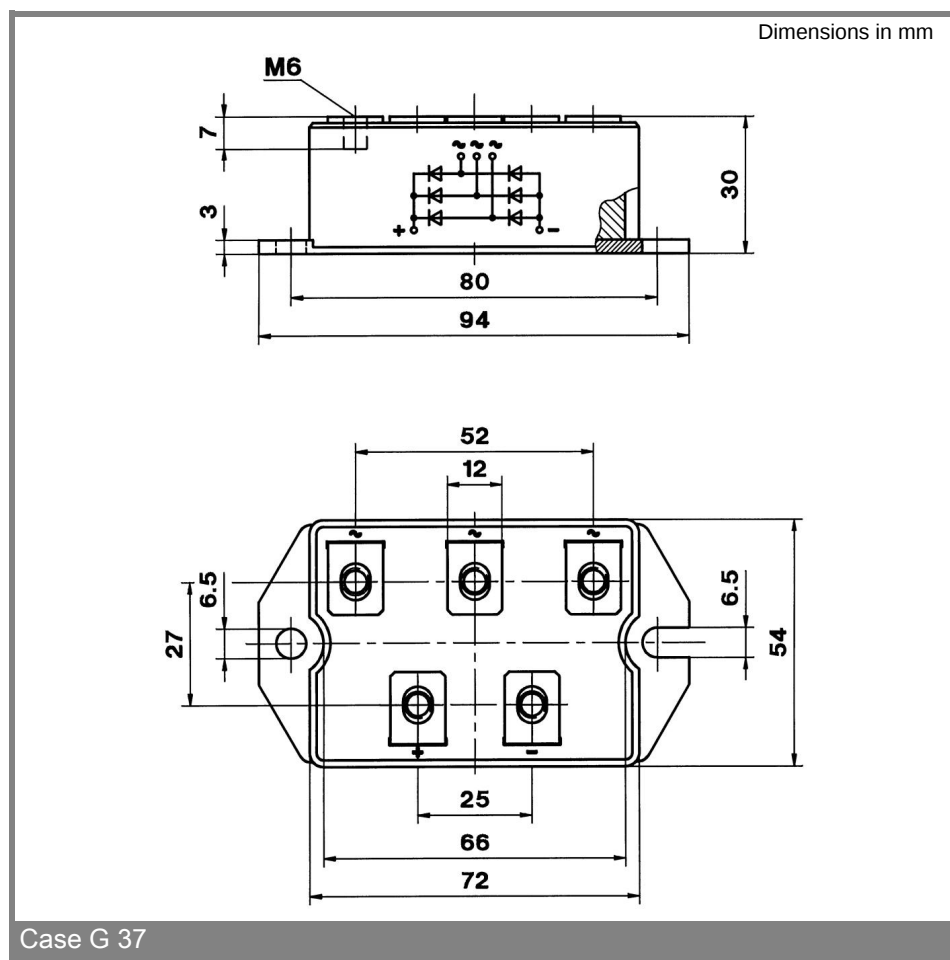

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

**EN** - For pricing and availability in your local country please visit one of the below links:

**DE** - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

**FR** - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[SKD210/16](#)

**EN**

This Datasheet is presented by  
the manufacturer

**DE**

Dieses Datenblatt wird vom  
Hersteller bereitgestellt

**FR**

Cette fiche technique est  
présentée par le fabricant